
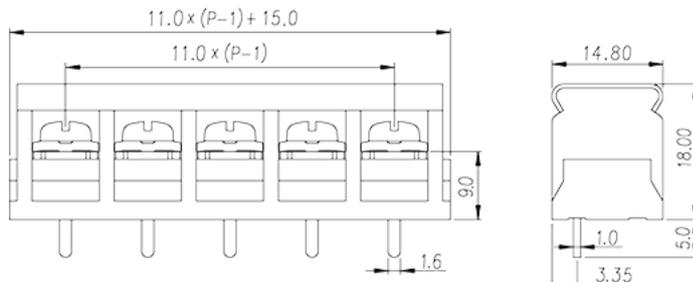


# DT-6G-B02W-XX

>

:2026-03-30 :1.1

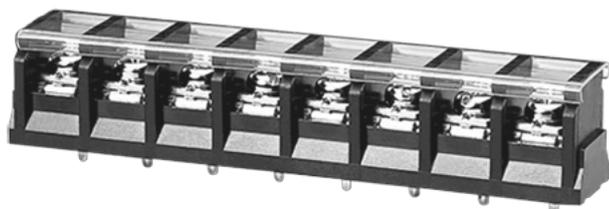

Pitch: 11.00mm , M4, 600V, 28A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	11.00.00
	Black(default)
	Screw connection
	Without
( x ) (mm)	1.0X1.6
PCB (mm)	2.3
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		32
(II/2)(V)		800
(III/2)(V)		800
(III/3)(V)		500
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		4
2	(mm <sup>2</sup> )	2.5
2	(mm <sup>2</sup> )	2.5
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
	(N.m)	1.2
	(N.m)	1.2
	(N.m)	1.4
		9~10

### -UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		28
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		28
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22

### &

(YES or NO)		YES
		130

-40

**UL**

(Group B) (AWG)	22~12
(Group B) (V)	600
(Group B) (A)	28
(Group C) (AWG)	22~12
(Group C) (V)	600
(Group C) (A)	28

**CUL**

(Group B) (AWG)	22~12
(Group B) (V)	600
(Group B) (A)	28
(Group C) (AWG)	22~12
(Group C) (V)	600
(Group C) (A)	28

**VDE**

(mm <sup>2</sup> )	0.5~4
(A)	32

