
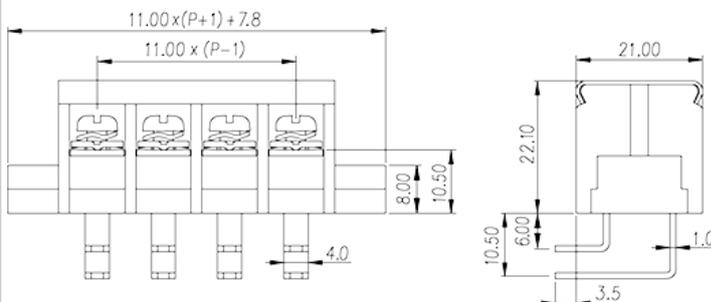


DT-66-A11W-XX

>

:2026-05-14 :1.1

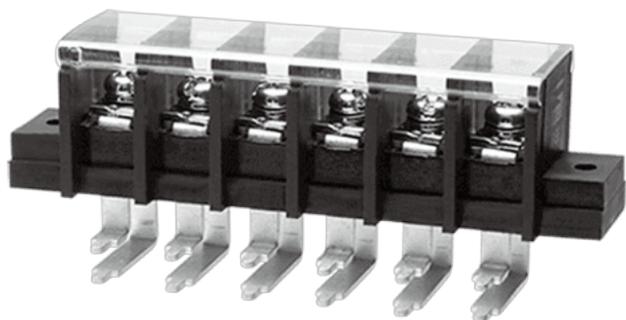

Pitch: 11.00mm , M4, 300V, 40A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	11.00
	Black(default)
	Screw connection
	With mounting flange
(x) (mm)	1.0X2.0
PCB (mm)	2.6~2.7
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(V)		800
(A)		41
(II/2)(V)		800
(III/2)(V)		800
(III/3)(V)		400
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		0.75
(mm ²)		6
(mm ²)		0.75
(mm ²)		6
2	(mm ²)	4
2	(mm ²)	4
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
(N.m)		1.7
(N.m)		1.2
(N.m)		1.7
		12~13

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		40
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	18
UL/CUL	AWG	8
UL/CUL	AWG	18
UL/CUL	AWG	8

&

(YES or NO)		YES
-------------	--	-----

	130
	-40

UL

(Group B) (AWG)	18~8
(Group B) (V)	300
(Group B) (A)	40
(Group D) (AWG)	18~8
(Group D) (V)	300
(Group D) (A)	10

CUL

(Group B) (AWG)	18~8
(Group B) (V)	300
(Group B) (A)	40
(Group D) (AWG)	18~8
(Group D) (V)	300
(Group D) (A)	10

VDE

(mm ²)	0.75~6
(V)	800
(A)	41

