


# DT-66-B02W-XX

>

:2026-05-14 :1.1

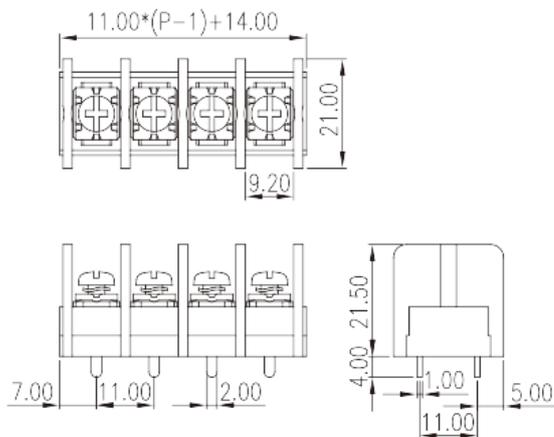

Pitch: 11.00mm , M4, 600V, 40A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	11.00
	Black(default)
	Screw connection
	Without
( x ) (mm)	1.0X2.0
PCB (mm)	2.6~2.7
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		41
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		800
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )		0.75
(mm <sup>2</sup> )		6
2	(mm <sup>2</sup> )	4
2	(mm <sup>2</sup> )	4
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
	(N.m)	1.7
	(N.m)	1.2
	(N.m)	1.7
		12~13

### -UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		40
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		40
UL/CUL	AWG	18
UL/CUL	AWG	8
UL/CUL	AWG	18
UL/CUL	AWG	8

### &

(YES or NO)		YES
		130

-40

**UL**

(Group B) (AWG)	18~8
(Group B) (V)	600
(Group B) (A)	40
(Group C) (AWG)	18~8
(Group C) (V)	600
(Group C) (A)	40

**CUL**

(Group B) (AWG)	18~8
(Group B) (V)	600
(Group B) (A)	40
(Group C) (AWG)	18~8
(Group C) (V)	600
(Group C) (A)	40

**VDE**

(mm <sup>2</sup> )	0.75~6
(A)	41

