
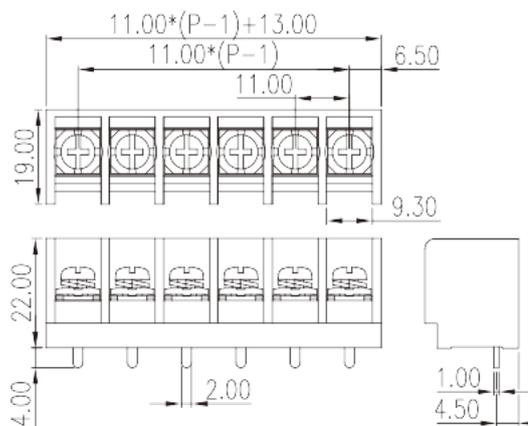


0167-52XX

>

:2026-05-14 :1.1

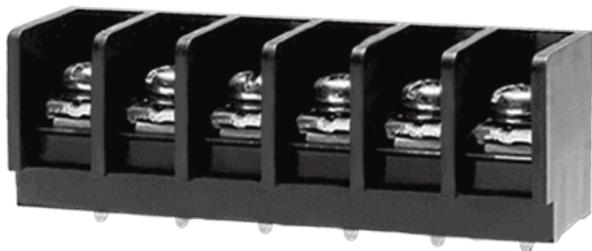

Pitch: 11.00mm , M4, 300V, 30A

	Barrier terminal blocks , Screw connection
	Single Row
(mm)	11.00.00
	Black(default)
	Screw connection
	Without
(x) (mm)	1.0X2.0
PCB (mm)	1.3x2.4
	Single Row
	PBT
	IIIa
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)		32
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		630
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		0.5
(mm ²)		4
(mm ²)		0.5
(mm ²)		4
2	(mm ²)	2.5
2	(mm ²)	2.5
		M4
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH2
(N.m)		1.8
(N.m)		1.2
(N.m)		1.8
		10~11

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		30
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		30
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	22
UL/CUL	AWG	10
UL/CUL	AWG	22
UL/CUL	AWG	10

&



(YES or NO)	YES
	130
	-40

UL

(Group B)(AWG)	22~10 / 8, SOL/STR
(Group B)(V)	300
(Group B)(A)	30 / 50 (With Ring or Fork terminals)
(Group C)(AWG)	22~10 / 8, SOL/STR
(Group C)(V)	300
(Group C)(A)	30 / 50 (With Ring or Fork terminals)
(Group D)(AWG)	22~10 / 8, SOL/STR
(Group D)(V)	600
(Group D)(A)	5

CUL

(Group B)(AWG)	22~10 / 8, SOL/STR
(Group B)(V)	300
(Group B)(A)	30 / 50 (With Ring or Fork terminals)
(Group C)(AWG)	22~10 / 8, SOL/STR
(Group C)(V)	300
(Group C)(A)	30 / 50 (With Ring or Fork terminals)
(Group D)(AWG)	22~10 / 8, SOL/STR
(Group D)(V)	600
(Group D)(A)	5

--	--

