


ESK508V-XXP

PCB > PCB

:2026-07-05 :1.1

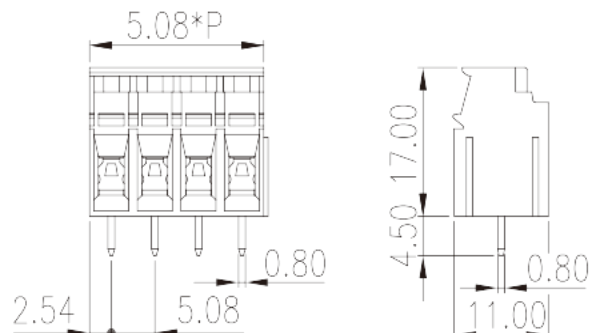

Pitch : 5.08mm, 300V, 23A

	PCB Terminal Blocks, Screw Connection
	PCB Terminal Blocks
(mm)	5.08
	Green (default)
	Screw Connection
	Without
(mm)	5.08*(P-1)+5.08
(mm)	11
(mm)	17
(x) (mm)	0.8x0.8
PCB (mm)	1.3
()	02P~24P
	Single level
	PA
	I
UL 94	V0



	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	24
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.5
(mm ²)	2.5
(mm ²)	0.5
(mm ²)	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
2 (mm ²)	0.5
2 (mm ²)	1
2 (mm ²)	0.5
2 (mm ²)	0.75
	M3
Width)(mm) (Blade thickness x	0.6x3.5
(N.m)	0.8
	10~11

-UL

(UL/CUL Group B)(V)	300
---------------------	-----

(UL/CUL Group B)(A)		23
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	26
UL/CUL	AWG	12
UL/CUL	AWG	26
UL/CUL	AWG	12

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)		26~12
(Group B)(V)		300
(Group B)(A)		23
(Group D)(AWG)		26~12
(Group D)(V)		300
(Group D)(A)		10

CUL

(Group B)(AWG)		26~12
(Group B)(V)		300
(Group B)(A)		23
(Group D)(AWG)		26~12
(Group D)(V)		300
(Group D)(A)		10

VDE

(mm ²)		0.5~2.5
(V)		250
(A)		24

