


DT-123HVR-XXP

PCB > PCB :2025-11-05 :V1



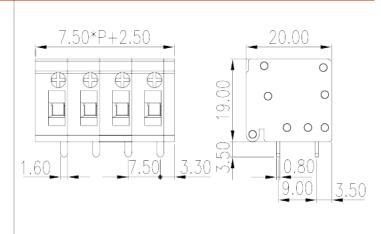

Pitch: 7.50mm, 600V, 20A

	PCB Terminal Blocks, Front Screw Connection
	PCB Terminal Blocks
(mm)	7.50
	Green (default)
	Front Screw Connection
	Without
(mm)	7.50*P+2.5
(mm)	20
(mm)	19
(x) (mm)	0.8x1.6
PCB (mm)	2
()	02P~12P
	Single level

	PA
	I
UL 94	V0



	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
-IEC	
(V)	630
(A)	24
(II/2)(V)	1000
(III/2)(V)	630
(III/3)(V)	400
(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6
(mm²)	0.5
(mm²)	2.5
(mm²)	0.5
(mm ²)	2.5
(mm²)	0.5
(mm²)	1.5
(mm ²)	0.5
(mm²)	1.5
2 (mm²)	0.5
2 (mm²)	1
2 (mm²)	0.5
2 (mm²)	1
(mm²)	0.5
(mm²) , , ,	0.75
2 , , , , (mm ²)	0.5
2 , , , , (mm ²)	1
	M2.5

Width)(mm)	(Blade thickness x	0.5x3.0
(N.m)		0.5
		13~14
-UL		
(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		20
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12
&		
가 (YES or NO	D)	YES
		120
		-40
UL		
(Group B)(AWG)		22~12
(Group B)(V)		600
(Group B)(A)		20
CUL		
(Group B)(AWG)		22~12
(Group B)(V)		600
(Group B)(A)		20
VDE	·	
(mm ²)		0.5~2.5
(V)		1000
(A)		24

