


DT-123VA-XXP

PCB > PCB :2025-11-05 :V1



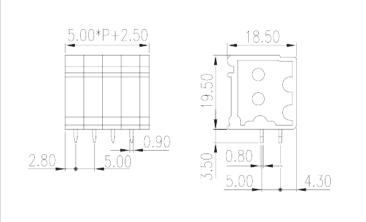

Pitch: 5.00mm, 300V, 26A(FW1)/20A(FW2)

	PCB Terminal Blocks, Front Screw Connection
	PCB Terminal Blocks
(mm)	5.00
	Green (default)
	Front Screw Connection
	Without
(mm)	5.00*(P-1)+7.5
(mm)	18.5
(mm)	19.5
(x) (mm)	0.8x0.9
PCB (mm)	1.5
()	02P~24P
	Single level

	PBT
	IIIa
UL 94	V0



	1000M at DC 500V
	COPPER ALLOY
	Tin PLATED
-IEC	
(V)	300
(A)	24
(II/2)(V)	400
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.5
(mm ²)	2.5
(mm ²)	0.5
(mm ²)	2.5
(mm ²)	0.5
(mm ²)	1.5
(mm ²)	0.5
(mm ²)	1.5
2 (mm²)	0.5
2 (mm²)	1
2 (mm²)	0.5
2 (mm²)	1
(mm²)	0.5
(mm ²) , , ,	0.75
2 , , , , (mm ²)	0.5
2 , , , , (mm ²)	1
	M2.5

Width) (mm)	(Blade thickness x	0.6x3.5	
	(N.m)	0.4	
	(N.m)	0.5	
. ,		13~14	
- (JL		
(UL/CUL	Group B)(V)	300	
(UL/CUL Group B)(A)		26(FW1)/20(FW2)	
(UL/CUL Group D)(V)		300	
(UL/CUL Group D)(A)		10	
UL/CUL	AWG	22	
UL/CUL	AWG	12	
UL/CUL	AWG	22	
UL/CUL	AWG	12	
& 가 (YES o	or NO)	YES	
·		120	
		-40	
UL			
(Group B)	(AWG)	22~12	
(Group B)(V)		300	
(Group B)(A)		26(FW1)/20(FW2)	
(Group D)	(AWG)	22~12	
(Group D)(V)	300	
(Group D)	(A)	10	
CUL			
(Group B)(AWG)	22~12	
(Group B)(V)	300	
(Group B)(A)	26(FW1)/20(FW2)	
(Group D)	(AWG)	22~12	
(Group D)()()	300	

(Group D)(A)	10
(Group D)(//)	10

VDE

(mm ²)	0.5~2.5
(V)	300
(A)	24

