


0136-20XX

PCB > PCB

:2026-05-14 :V1

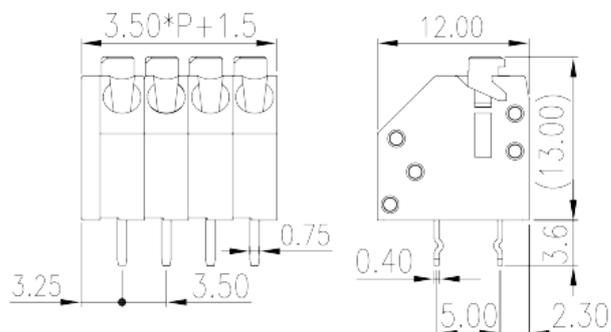

Pitch : 3.50 mm, 300V, 6A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	3.50
	Grey (default)
	Push in design
	Without
	Wave soldering
(mm)	$3.50 \times (P-1) + 5.0$
(mm)	12
(mm)	13
() x () (mm)	0.4x0.75
PCB (mm)	1
()	02P~24P
	Single level
	PA
	I

UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	400
(A)	8
(II/2)(V)	630
(III/2)(V)	400
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	0.75
(mm ²)	0.5
(mm ²)	0.75
(mm ²) , ,	0.25
(mm ²) , ,	0.75
(mm ²) , ,	0.25
(mm ²) , ,	0.5
Width)(mm) (Blade thickness x	0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	6
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	6
UL/CUL AWG	28
UL/CUL AWG	16



UL/CUL	AWG	28
UL/CUL	AWG	16

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)		28~16(SOL)
(Group B)(V)		300
(Group B)(A)		6
(Group D)(AWG)		28~16(SOL)
(Group D)(V)		300
(Group D)(A)		6

CUL

(Group B)(AWG)		28~16(SOL)
(Group B)(V)		300
(Group B)(A)		6
(Group D)(AWG)		28~16(SOL)
(Group D)(V)		300
(Group D)(A)		6

VDE

(mm ²)		0.2~0.75
(V)		250
(A)		8

--	--	--

