


0136-21XX

PCB > PCB

:2026-02-09

:V1

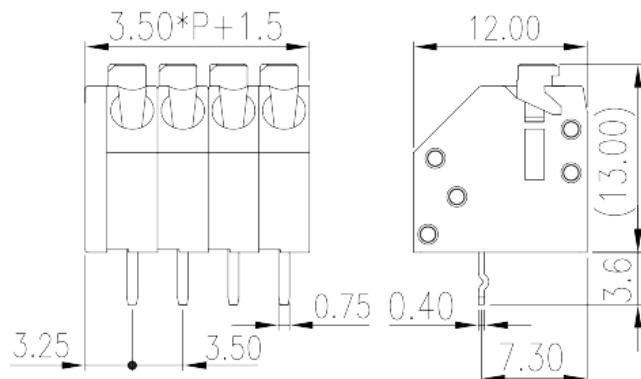

Pitch : 3.50 mm, 300V, 6A

	PCB Terminal Blocks, Push-in Design
	PCB Terminal Blocks
(mm)	3.50
	Grey (default)
	Push in design
	Without
	Wave soldering
(mm)	3.50*(P-1)+5.0
(mm)	12
(mm)	13
(x) (mm)	0.4x0.75
PCB (mm)	1
()	02P~24P
	Single level

	PA
	I



Delight Through Connections

UL 94

V0

500M at DC 500V

COPPER ALLOY

Tin PLATED

-IEC

(V)	250
(A)	8
(II/2)(V)	400
(III/2)(V)	250
(III/3)(V)	200
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm ²)	0.2
(mm ²)	0.75
(mm ²)	0.5
(mm ²)	0.75
(mm ²) , , ,	0.25
(mm ²) , , ,	0.75
(mm ²) , , ,	0.25
(mm ²) , , ,	0.5
Width)(mm)	(Blade thickness x 0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	6
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	6
UL/CUL	AWG 28
UL/CUL	AWG 16

UL/CUL	AWG	28
UL/CUL	AWG	16

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)	28~16(SOL)
(Group B)(V)	300
(Group B)(A)	6
(Group D)(AWG)	28~16(SOL)
(Group D)(V)	300
(Group D)(A)	6

CUL

(Group B)(AWG)	28~16(SOL)
(Group B)(V)	300
(Group B)(A)	6
(Group D)(AWG)	28~16(SOL)
(Group D)(V)	300
(Group D)(A)	6

VDE

(mm ²)	0.2~0.75
(V)	130
(A)	8

