
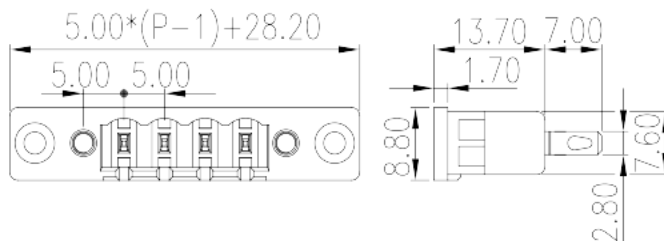


# 5EHDKPM-XXP

PCB > PCB -

:2026-07-04 :V1

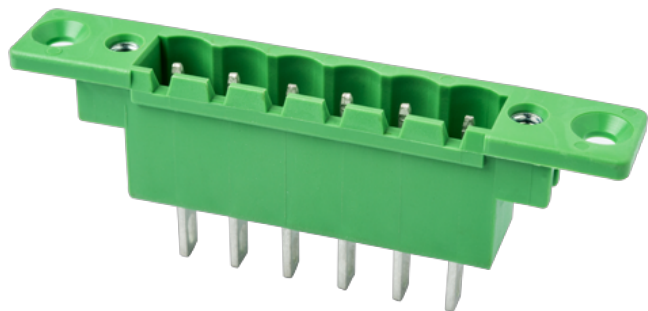

Pitch : 5.00 mm, 300V, 15A

	PCB Connector – Socket, Wave soldering
	PCB Connector – Socket
(mm)	5.00
	Green (default)
	With threaded flange
	Iron Soldering
(mm)	$5.00 \times (P-1) + 28.2$
(mm)	8.8
(mm)	13.7
(    x    ) (mm)	2.8x0.8
(    )	02P~12P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V



	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	630
(A)	18
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(N.m)	0.3

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL                      AWG	24
UL/CUL                      AWG	12
UL/CUL                      AWG	24
UL/CUL                      AWG	12

**&**

가            (YES or NO)	YES
	120
	-40

**UL**

(Group B)(V)	300
--------------	-----

(Group B)(A)	15
(Group D)(V)	300
(Group D)(A)	10

### CUL

(Group B)(V)	300
(Group B)(A)	15
(Group D)(V)	300
(Group D)(A)	10

### VDE

(V)	600
(A)	18

