


ECH880RT-XXP

PCB > PCB -

:2026-02-10 :V1

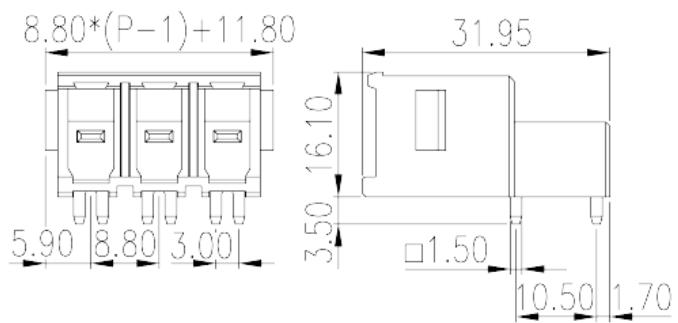

Pitch: 8.80 mm , 600V, 65A

	PCB connector Socket, Wave soldering
	PCB connector Socket
(mm)	8.80
	Green(default)
	With lock flange
	Wave soldering
(mm)	8.80x(P-1)+8.50
(mm)	31.95
(mm)	15.6
(x) (mm)	1.5x1.5
PCB (mm)	2.5~2.6
()	02P~12P
	Single level

UL 94	PA I V0
-------	---------------

	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	1000
(A)	57
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	1000
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	65
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	65

&

가	(YES or NO)	YES
		115
		-40

UL

(Group B)(V)	600
(Group B)(A)	65
(Group C)(V)	600
(Group C)(A)	65

CUL

(Group B)(V)	600
(Group B)(A)	65
(Group C)(V)	600

