


# 141R-XXP

PCB &gt; PCB

:2026-02-10 :V1

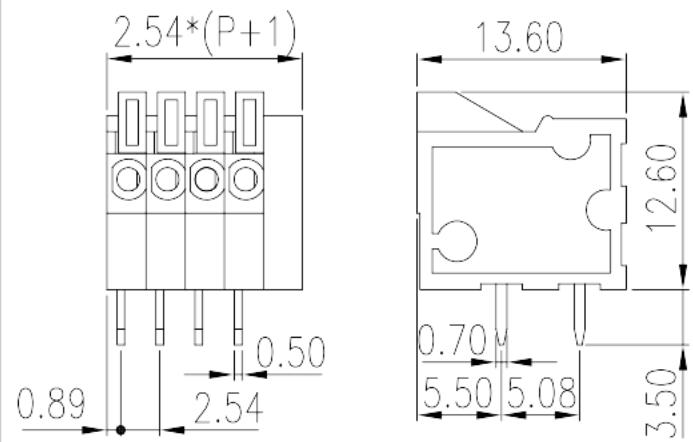

Pitch : 2.54mm, 150V, 5A

	PCB Terminal Blocks, Push-in Design
	PCB Terminal Blocks
(mm)	2.54
	Green (default)
	Push in design
	Without
	Wave soldering
(mm)	2.54*(P+1)
(mm)	12.6
(mm)	13.6
(    x    ) (mm)	0.5x0.7
PCB (mm)	1.1
(    )	02P~24P
	Single level

	PA
	I



Delight Through Connections

UL 94

V0

500M at DC 500V

COPPER ALLOY

Tin PLATED

## -IEC

(V)	160
(A)	6
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> ) , , ,	0.25
(mm <sup>2</sup> ) , , ,	0.5
(mm <sup>2</sup> ) , , ,	0.25
(mm <sup>2</sup> ) , , ,	0.34
	9~10

## -UL

(UL/CUL Group B)(V)	150
(UL/CUL Group B)(A)	5
UL/CUL AWG	26
UL/CUL AWG	20
UL/CUL AWG	26
UL/CUL AWG	20

&amp;

가	(YES or NO)	YES
		120
		-40

## UL

(Group B)(AWG)	26~20
(Group B)(V)	150
(Group B)(A)	5

## CUL

(Group B)(AWG)	26~20
(Group B)(V)	150
(Group B)(A)	5

