


# 0136-10XX

PCB &gt; PCB

:2026-05-14 :V1

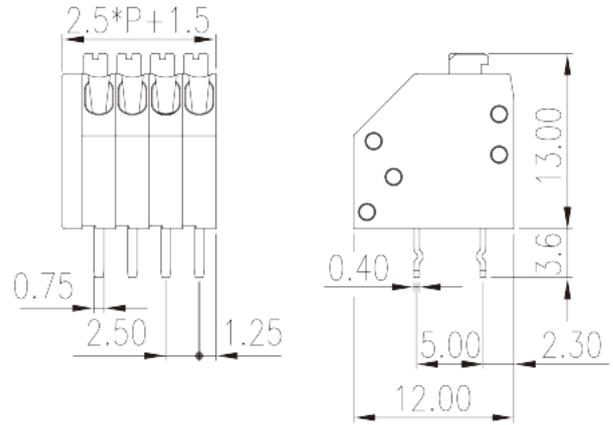

Pitch : 2.50 mm, 300V, 2A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	2.50
	Grey (default)
	Push in design
	Without
	Wave soldering
(mm)	$2.50 * (P - 1) + 4.0$
(mm)	12
(mm)	13
( ) x ( ) (mm)	0.4x0.75
PCB (mm)	1
( )	02P~24P
	Single level
	PA
	I

UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	320
(A)	2
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	0.5
Philips	0.4x2.5
	8~9

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	2
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	2
UL/CUL AWG	28
UL/CUL AWG	20
UL/CUL AWG	28



UL/CUL	AWG	20
<b>&amp;</b>		
가	(YES or NO)	YES
		120
		-40

**UL**

(Group B)(AWG)	28~20(SOL)
(Group B)(V)	300
(Group B)(A)	2
(Group D)(AWG)	28~20(SOL)
(Group D)(V)	300
(Group D)(A)	2

**CUL**

(Group B)(AWG)	28~20(SOL)
(Group B)(V)	300
(Group B)(A)	2
(Group D)(AWG)	28~20(SOL)
(Group D)(V)	300
(Group D)(A)	2

**VDE**

(mm <sup>2</sup> )	0.2~0.5
(V)	250
(A)	2

--	--

