


## 0136-10XX

PCB > PCB :2025-11-05 :V1



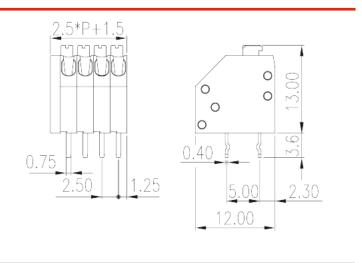

Pitch: 2.50 mm, 300V, 2A

	PCB Terminal Blocks, Push-in Design
	PCB Terminal Blocks
(mm)	2.50
	Grey (default)
	Push in design
	Without
	Wave soldering
(mm)	2.50*(P-1)+4.0
(mm)	12
(mm)	13
( x ) (mm)	0.4x0.75
PCB (mm)	1
( )	02P~24P
	Single level

PA
1

UL 94	VO
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
-IEC	
(V)	320
(A)	2
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm²)	0.2
(mm²)	0.5
(mm²)	0.2
(mm²)	0.5
(mm <sup>2</sup> )	0.25
(mm <sup>2</sup> )	0.5
(mm²)	0.25
(mm <sup>2</sup> )	0.5
Philips	0.4x2.5
	8~9
-UL	
(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	2
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	2
UL/CUL AWG	28
UL/CUL AWG	20
UL/CUL AWG	28



L/CUL AWG	20
&	
가 (YES or NO)	YES
	120
	-40
JL	
(Group B)(AWG)	28~20(SOL)
(Group B)(V)	300
(Group B)(A)	2
(Group D)(AWG)	28~20(SOL)
(Group D)(V)	300
(Group D)(A)	2
CUL	
(Group B)(AWG)	28~20(SOL)
(Group B)(V)	300
(Group B)(A)	2
(Group D)(AWG)	28~20(SOL)
(Group D)(V)	300
(Group D)(A)	2
/DE	
(mm <sup>2</sup> )	0.2~0.5
(V)	250
(A)	2

