
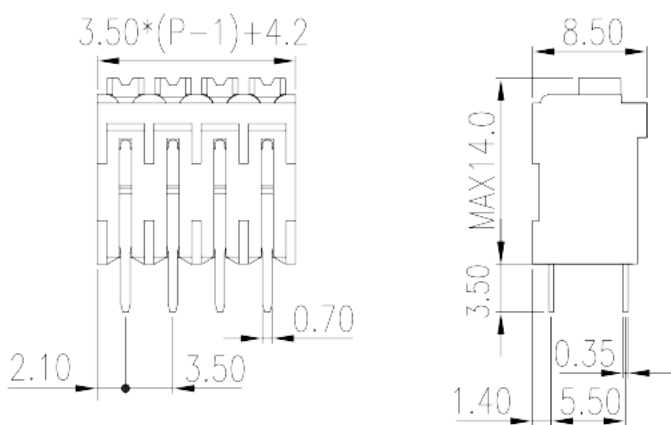


0138-50XX

PCB > PCB

:2026-07-04 :V1

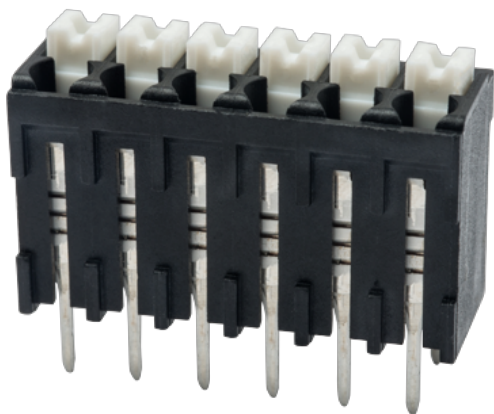

Pitch : 3.50mm, 300V, 12A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	3.50
	Black (default)
	Push in design
	Without
	Wave soldering
(mm)	$3.50 * (P-1) + 4.2$
(mm)	8.5
(mm)	14
() x () (mm)	0.35x0.7
PCB (mm)	1~1.1
()	02P~24P
	Single level
	PBT
	IIIa



UL 94	V0
	1000M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	160
(A)	17.5
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1
(mm ²) , ,	0.25
(mm ²) , ,	0.75
Width)(mm) (Blade thickness x	0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	12
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	12
UL/CUL AWG	28
UL/CUL AWG	16



UL/CUL	AWG	28
UL/CUL	AWG	16

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)		28~16
(Group B)(V)		300
(Group B)(A)		12
(Group D)(AWG)		28~16
(Group D)(V)		300
(Group D)(A)		12

CUL

(Group B)(AWG)		28~16
(Group B)(V)		300
(Group B)(A)		12
(Group D)(AWG)		28~16
(Group D)(V)		300
(Group D)(A)		12

VDE

(mm ²)		0.2~1.5
(V)		160
(A)		17.5

--	--	--

