
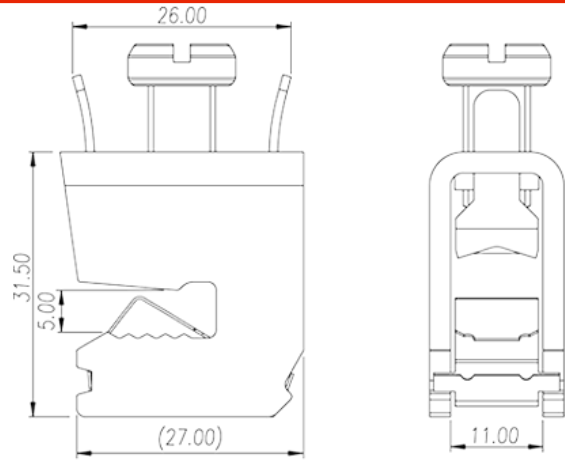


# DKZ35A

DIN Rail Terminal Blocks &gt; Busbar Terminal Blocks

Date:2026-07-04Version:1.1

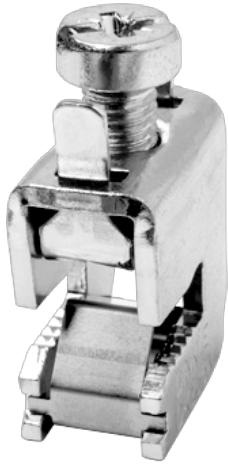

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design. The final product is made according to engineering drawing.

## Product Description

M8, Steel

## General information

|                   |  |
|-------------------|--|
| Short description | DIN Rail terminal blocks, Busbar terminal blocks |
| Connection method | Screw connection                                 |
| Type of locking   | Busbar mounting                                  |
| Connection points | 1  |

## Connection data-IEC

|  |         |
|--|---------|
| Conductor cross section solid. min (mm <sup>2</sup> )    | 4       |
| Conductor cross section solid.max (mm <sup>2</sup> )     | 35      |
| Conductor cross section stranded. min (mm <sup>2</sup> ) | 4       |
| Conductor cross section stranded. max (mm <sup>2</sup> ) | 35      |
| Screw thread   | M8      |
| Slotted screwdriver size (Blade thickness x Width)(mm)   | 1.0x5.5 |
| Philips screwdriver size                                 | PH3     |
| Rated torque (N.m)                                       | 6       |
| End cover plate required                                 | NO      |
| Grounding connections                                    | NO      |


## Connection data-UL

|  |    |
|--|----|
| Min. solid wire connection (AWG) acc. to UL/CUL  | 10 |
| Max. solid wire connection AWG acc. to UL/CUL    | 2  |
| Min. stranded wire connection AWG acc. to UL/CUL | 10 |
| Max. stranded wire connection AWG acc. to UL/CUL | 2  |

## Environment & Safety

|   |    |
|---|----|
| Back of the hand protection (YES or NO) | NO |
| Finger protection (YES or NO)           | NO |

## Drawings

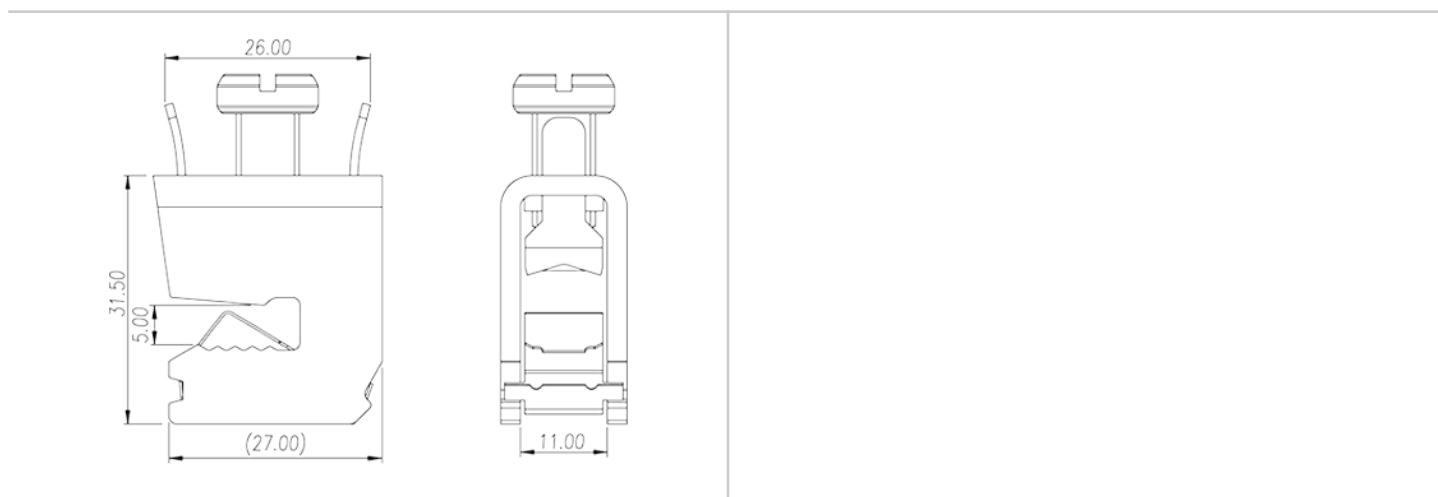

## Approvals

