


# **7ESDV-XXP**

PCB Terminal Blocks > PCB Connector-Plug

Date:2025-11-04Version:1.1



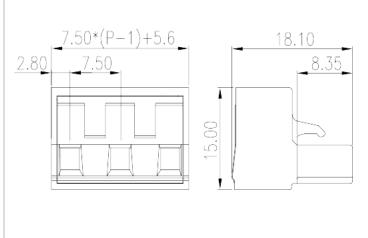

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

### **Product Description**

Pitch: 7.50 mm, 300V, 15A

#### General information

Chart description	DCP Connector Dlug Scrow Connection
Short description	PCB Connector – Plug, Screw Connection
Category	PCB Connector – Plug
Pitch (mm)	7.5
Color	Green (default)
Connection method	Screw Connection
Type of locking	Without
Length (mm)	7.50*(P-1)+5.6
Width (mm)	18.1
Height (mm)	15
Number of positions	02P~12P
Level	Single level

#### Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	VO



Insulation resistance	$\Box 500 M\Omega$ at DC 500V
Conductor material	COPPER ALLOY
Plating of conductor surface	Tin PLATED
Connection data-IEC	
Rated voltage (V)	1000
Rated current (A)	18
Rated voltage (II/2)(V)	1000
Rated voltage (III/2) (V)	630
Rated voltage (III/3)(V)	500
Rated impulse voltage (II/2)(KV)	6
Rated impulse voltage (III/2)(KV)	6
Rated impulse voltage (III/3)(KV)	6
Conductor cross section solid. min (mm²)	0.2
Conductor cross section solid.max (mm²)	4
Conductor cross section stranded. min (mm²)	0.2
Conductor cross section stranded. max (mm²)	2.5
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	0.25
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	2.5
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	0.25
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	2.5
2 conductors with same cross section, solid, min (mm²)	0.2
2 conductors with same cross section, solid, max (mm²)	1.5
2 conductors with same cross section, stranded, min (mm²)	0.2
2 conductors with same cross section, stranded, max (mm²)	1.5
2 conductors with same cross section flexible, with min ferrule without plastic sleeve (mm²)	0.25
2 conductors with same cross section flexible, with max ferrule without plastic sleeve (mm²)	0.75
2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm²)	0.5
2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm²)	1.5

Screw thread	M2.5
Slotted screwdriver size (Blade thickness x Width)(mm)	0.6x3.5
Philips screwdriver size	PH1
Rated torque (N.m)	0.5
Stripping Length (mm)	7~8
Connection data-UL	
Rated voltage (UL/CUL Group B)(V)	300
Rated current (UL/CUL Group B)(A)	15
Rated voltage (UL/CUL Group D)(V)	300
Rated current (UL/CUL Group D)(A)	10
Min. solid wire connection (AWG) acc. to UL/CUL	28
Max. solid wire connection AWG acc. to UL/CUL	12
Min. stranded wire connection AWG acc. to UL/CUL	30
Max. stranded wire connection AWG acc. to UL/CUL	12
Environment & Safety	VEC
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40
JL Recognized	
Wire Range (Group B)(AWG)	30 ( str ) ~12, 28 ( sol ) ~12
Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	15
Wire Range (Group D)(AWG)	30 ( str ) ~12, 28 ( sol ) ~12
Rated voltage (Group D)(V)	300
Rated current (Group D)(A)	10
CLIL Pacagnized	
CUL Recognized	
Wire Range (Group B)(AWG)	30 ( str ) ~12, 28 ( sol ) ~12
	30 ( str ) ~12, 28 ( sol ) ~12 300
Wire Range (Group B)(AWG)	
Wire Range (Group B)(AWG) Rated voltage (Group B)(V)	300




Rated current (Group D)(A)	10
----------------------------	----

### **VDE** Approval

Wire Range (mm²)	0.2~4(sol)/0.2~2.5(str)
Rated voltage (V)	800
Rated current (A)	18

## Drawings

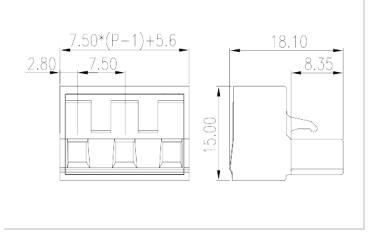

## Approvals







