


0159-11XX

PCB Terminal Blocks > PCB Connector-Socket

Date:2025-11-03Version:V1



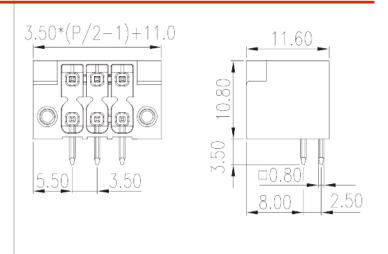

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Pitch: 3.50 mm, 150V, 8A

General information

Short description	PCB Connector–Socket, Wave soldering
Category	PCB Connector–Socket
Pitch (mm)	3.50
Color	Black (default)
Type of locking	With threaded flange / With release tool
Soldering method	Wave soldering
Length (mm)	3.50*(P/2-1)+11.0
Width (mm)	11.6
Height (mm)	10.8
Pin demensions (Thickness x Width)(mm)	0.8x0.8
PCB hole diameter (mm)	1.4
Number of positions	04P~40P
Level	Double level

Material information


Insulation material	PA
---------------------	----


Insulation material group	I
Flame retardant rating , compliant with UL94	VO
Insulation resistance	□500MΩ at DC 500V
Conductor material	COPPER ALLOY
Plating of conductor surface	Tin PLATED
Connection data-IEC	
Rated voltage (V)	250
Rated current (A)	8
Rated voltage (II/2)(V)	250
Rated voltage (III/2) (V)	160
Rated voltage (III/3)(V)	160
Rated impulse voltage (II/2)(KV)	2.5
Rated impulse voltage (III/2)(KV)	2.5
Rated impulse voltage (III/3)(KV)	2.5
Tightening torque with flange. max (N.m)	0.1
3 3 1 3 , ,	
	150
Connection data-UL	150 8
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A)	
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A)	
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Environment & Safety	8
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Environment & Safety Finger protection (YES or NO)	8 YES
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C)	8 YES 120
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C) Operating temperature. min (°C)	8 YES 120
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C) Operating temperature. min (°C) JL Recognized	YES 120 -40
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C) Operating temperature. min (°C) JL Recognized Rated voltage (Group B)(V)	YES 120 -40
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C) Operating temperature. min (°C) JL Recognized Rated voltage (Group B)(V) Rated current (Group B)(A)	YES 120 -40
Connection data-UL Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C) Operating temperature. min (°C) JL Recognized Rated voltage (Group B)(V) Rated current (Group B)(A) Rated voltage (Group C)(V)	YES 120 -40 150 8 50

CUL Recognized

Rated voltage (Group B)(V)	150
Rated current (Group B)(A)	8
Rated voltage (Group C)(V)	50
Rated current (Group C)(A)	8
Rated voltage (Group D)(V)	300
Rated current (Group D)(A)	8

Drawings

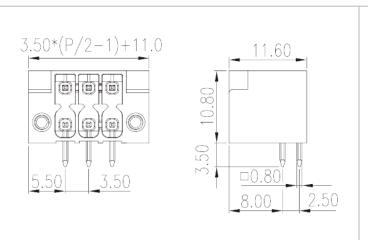



Approvals







