


0191-01XX

PCB Terminal Blocks > PCB Connector-Plug

Date:2025-11-03Version:1.1



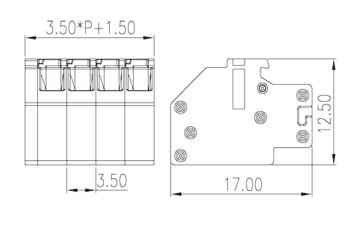

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Pitch: 3.50 mm, 150V, 2A

General information

Short description	PCB Connector – Plug, Push-in Design
Category	Push-in Design
Pitch (mm)	3.50
Color	Black (default)
Connection method	Push in Design
Type of locking	Without
Length (mm)	3.50*P+1.5
Width (mm)	17
Height (mm)	12.5
Number of positions	02P~20P
Level	Single level

Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0



Insulation resistance	\square 500M Ω at DC 500V
Conductor material	STAINLESS STEEL
Plating of conductor surface	Tin PLATED
Connection data-IEC	
Rated voltage (V)	160
Rated current (A)	4
Rated voltage (II/2)(V)	200
Rated voltage (III/2) (V)	160
Rated voltage (III/3)(V)	100
Rated impulse voltage (II/2)(KV)	3
Rated impulse voltage (III/2)(KV)	3
Rated impulse voltage (III/3)(KV)	3
Conductor cross section solid. min (mm²)	0.5
Conductor cross section solid.max (mm²)	1.5
Conductor cross section stranded. min (mm²)	0.5
Conductor cross section stranded. max (mm²)	1.5
Stripping Length (mm)	8~9
Connection data-UL	150
Rated voltage (UL/CUL Group B)(V)	150
Rated current (UL/CUL Group B)(A)	2
Min. solid wire connection (AWG) acc. to UL/CUL	28
Max. solid wire connection AWG acc. to UL/CUL	16
Min. stranded wire connection AWG acc. to UL/CUL	28
Max. stranded wire connection AWG acc. to UL/CUL	16
Environment & Safety	
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40
JL Recognized	
3L Recognized	
Wire Range (Group B)(AWG)	28~16




Rated current (Group B)(A)	2
----------------------------	---

CUL Recognized

Wire Range (Group B)(AWG)	28~16
Rated voltage (Group B)(V)	150
Rated current (Group B)(A)	2

Drawings

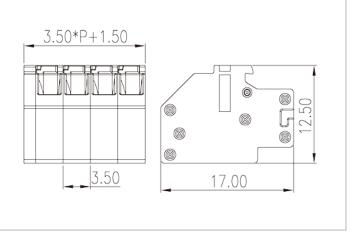

Approvals





