


# DPP4N

DIN Rail Terminal Blocks > Push-in Design

Date:2025-11-04Version:1.1





The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

### **Product Description**

300V, 30A, Beige (default)

#### General information

Short description	Bi-level Feed-Through Terminal Block, Push-in Design
Category	Bi level Feed Through Terminal Blocks
Color	Beige (default)
Connection method	Push-in Design
Type of locking	Rail Mounting
Length (mm)	81
Width (mm)	6.1
Height (mm)	46
Number of positions	<u>≥</u> 1P
Level	Double level
Connection points	4

#### Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0




Insulation resistance	≥500MΩ at DC 500V	
Connection data-IEC		
Rated voltage (V)	500	
Rated current (A)	28	
Rated voltage (III/3)(V)	500	
Rated impulse voltage (III/3)(KV)	6	
Conductor cross section solid. min (mm²)	0.2	
Conductor cross section solid.max (mm²)	6	
Conductor cross section stranded. min (mm²)	0.2	
Conductor cross section stranded. max (mm²)	4	
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	4	
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	4	
2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm²)	0.5	
2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm²)	1	
Slotted screwdriver size (Blade thickness x Width)(mm)	0.8x4.0	
Stripping Length (mm)	12	
Mounting rail	TS-35	
End cover plate required	YES	
Grounding connections	NO	
Connection data-UL		
Rated voltage (UL/CUL Group B)(V)	300	
Rated current (UL/CUL Group B)(A)	30	
Rated voltage (UL/CUL Group C)(V)	300	
Rated current (UL/CUL Group C)(A)	30	
Rated voltage (UL/CUL Group D)(V)	600	
Rated current (UL/CUL Group D)(A)	5	
Min. solid wire connection (AWG) acc. to UL/CUL	24	
Max. solid wire connection AWG acc. to UL/CUL	10	


Min. stranded wire connection AWG acc. to UL/CUL	24
Max. stranded wire connection AWG acc. to UL/CUL	10

### Environment & Safety

Back of the hand protection (YES or NO)	YES
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40

## Drawings



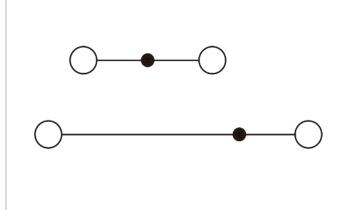

## Approvals





