


# **DK95**

DIN Rail Terminal Blocks > Screw Connection

Date:2025-11-03Version:1.2





The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

#### **Product Description**

M8, 600V, 230A, Beige (default)

#### General information

Short description	DIN rail terminal blocks, Feed through terminal blocks
Category	Feed through terminal blocks
Color	Beige (default)
Connection method	Screw connection
Type of locking	Rail mounting
Length (mm)	80
Width (mm)	32.2
Height (mm)	88.5
Number of positions	□1Р
Level	Single level
Connection points	2

#### Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0



Insulation resistance	$\square$ 500M $\Omega$ at DC 500V
Connection data-IEC	
Rated voltage (V)	1000
Rated current (A)	232
Rated voltage (III/3)(V)	1000
Rated impulse voltage (II/2)(KV)	8
Rated impulse voltage (III/2)(KV)	8
Rated impulse voltage (III/3)(KV)	8
Conductor cross section solid. min (mm²)	35
Conductor cross section solid.max (mm²)	95
Conductor cross section stranded. min (mm²)	35
Conductor cross section stranded. max (mm²)	95
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	35
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	70
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	35
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	70
2 conductors with same cross section, solid, min (mm²)	35
2 conductors with same cross section, solid, max (mm²)	35
2 conductors with same cross section, stranded, min (mm²)	35
2 conductors with same cross section, stranded, max (mm²)	35
2 conductors with same cross section flexible, with min ferrule without plastic sleeve (mm²)	35
2 conductors with same cross section flexible, with max ferrule without plastic sleeve (mm²)	35
2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm²)	35
2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm²)	35
Screw thread	M8
Slotted screwdriver size (Blade thickness x Width)(mm)	Hex socket 6
Philips screwdriver size	Hex socket 6
Rated torque (N.m)	10.2



Stripping Length (mm)	30~35
Mounting rail	TS-35
End cover plate required	NO
Grounding connections	NO

Rated voltage (UL/CUL Group B)(V)	600
Rated current (UL/CUL Group B)(A)	230str/100sol
Rated voltage (UL/CUL Group C)(V)	600
Rated current (UL/CUL Group C)(A)	230str/100sol
Rated voltage (UL/CUL Group D)(V)	600
Rated current (UL/CUL Group D)(A)	5
Min. solid wire connection (AWG) acc. to UL/CUL	4/0
Max. solid wire connection AWG acc. to UL/CUL	2
Min. stranded wire connection AWG acc. to UL/CUL	4/0
Max. stranded wire connection AWG acc. to UL/CUL	2

#### **Environment & Safety**

Back of the hand protection (YES or NO)	YES
Finger protection (YES or NO)	NO
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40

#### **UL** Recognized

Wire Range (Group B)(AWG)	2~4/0
Rated voltage (Group B)(V)	600
Rated current (Group B)(A)	230str/100sol
Wire Range (Group C)(AWG)	2~4/0
Rated voltage (Group C)(V)	600
Rated current (Group C)(A)	230str/100sol
Wire Range (Group D)(AWG)	2~4/0
Rated voltage (Group D)(V)	600
Rated current (Group D)(A)	5

#### **CUL** Recognized

Wire Range (Group B)(AWG)	2~4/0
Rated voltage (Group B)(V)	600
Rated current (Group B)(A)	230str/100sol
Wire Range (Group C)(AWG)	2~4/0
Rated voltage (Group C)(V)	600
Rated current (Group C)(A)	230str/100sol
Wire Ranget (Group D)(AWG)	2~4/0
Rated voltage (Group D)(V)	600
Rated current (Group D)(A)	5


#### **VDE** Approval


Wire Range (mm²)	35~95
Rated voltage (V)	1000
Rated current (A)	232

### Explosion - proof Approvals

Wire Range (mm²)	35~95
Rated voltage (V)	1000
Rated current (A)	232

## Drawings

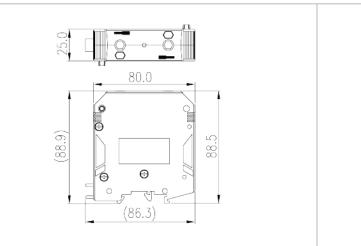



### Approvals











