


0156-21XX-BK-WR

PCB Terminal Blocks > In tape-on-reel packing

Date:2025-11-03Version:V1



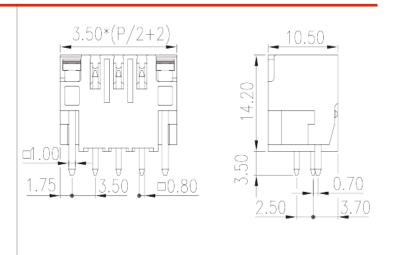

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Pitch: 3.50 mm, 150V, 10A

General information


Short description	PCB Connector–Socket, Wave soldering
Category	PCB Connector–Socket
Pitch (mm)	3.5
Color	Black (default)
Type of locking	With threaded flange / With lock flange
Soldering method	Wave soldering
Length (mm)	3.50*(P/2+2)
Width (mm)	10.5
Height (mm)	14.2
Pin demensions (Thickness x Width)(mm)	0.8x0.8
PCB hole diameter (mm)	1.4
Number of positions	04P~40P
Level	Double level


Material information

Insulation material	PA
---------------------	----

Insulation material group	I	
Flame retardant rating , compliant with UL94	VO	
Insulation resistance	\square 500M Ω at DC 500V	
Conductor material	COPPER ALLOY	
Plating of conductor surface	Tin PLATED	
Connection data-IEC		
Rated voltage (V)	320	
Rated current (A)	10	
Rated voltage (II/2)(V)	320	
Rated voltage (III/2) (V)	160	
Rated voltage (III/3)(V)	160	
Rated impulse voltage (II/2)(KV)	2.5	
Rated impulse voltage (III/2)(KV)	2.5	
Rated impulse voltage (III/3)(KV)	2.5	
Connection data-UL		
Rated voltage (UL/CUL Group B)(V)	150	
Rated current (UL/CUL Group B)(A)	10	
Environment & Safety		
Finger protection (YES or NO)	YES	
Operating temperature. max (°C)	120	
Operating temperature. min (°C)	-40	
UL Recognized		
Rated voltage (Group B)(V)	150	
Rated current (Group B)(A)	10	
CUL Recognized		
Rated voltage (Group B)(V)	150	
Rated current (Group B)(A)	10	

Drawings

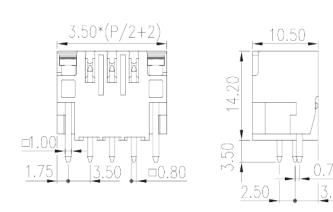



Approvals





