


# **5EHDRR-XXPWR**

PCB Terminal Blocks > In tape-on-reel packing

Date:2025-11-04Version:V1



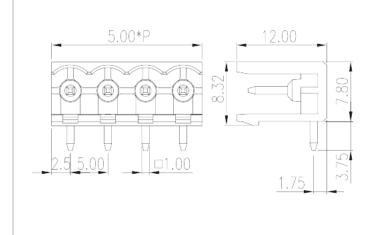

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

### **Product Description**

Pitch: 5.00 mm, 300V, 15A


#### General information


Short description	PCB Connector – Socket, Wave soldering
Category	PCB Connector – Socket
Pitch (mm)	5.00
Color	Black (default)
Type of locking	Without
Soldering method	Wave soldering
Length (mm)	5.00*(P-1)+5.0
Width (mm)	12
Height (mm)	8.32
Pin demensions (Thickness x Width)(mm)	1.0x1.0
PCB hole diameter (mm)	1.6~1.7
Number of positions	02P~24P
Level	Single level

#### Material information

Insulation material	PA
---------------------	----

Insulation material group	I
Flame retardant rating , compliant with UL94	V0
Insulation resistance	□500MΩ at DC 500V
Conductor material	COPPER ALLOY
Plating of conductor surface	Tin PLATED
Connection data-IEC	
Rated voltage (V)	630
Rated current (A)	18
Rated voltage (II/2)(V)	630
Rated voltage (III/2) (V)	320
Rated voltage (III/3)(V)	320
Rated impulse voltage (II/2)(KV)	4
Rated impulse voltage (III/2)(KV)	4
Rated impulse voltage (III/3)(KV)	4
Connection data-UL	
Rated voltage (UL/CUL Group B)(V)	300
	4.5
Rated current (UL/CUL Group B)(A)	15
Rated current (UL/CUL Group B)(A)  Rated voltage (UL/CUL Group D)(V)	300
Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A)	300
Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A)	300
Rated voltage (UL/CUL Group D)(V)  Rated current (UL/CUL Group D)(A)  Environment & Safety	300 10

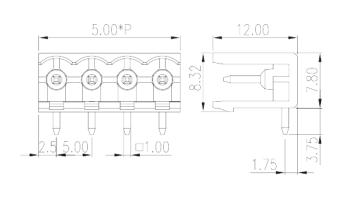



## Approvals



