


# ECH116HRS-XXP

PCB Terminal Blocks > PCB Connector-Socket

Date:2025-09-09



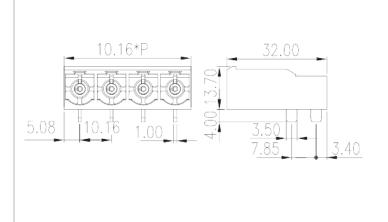

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

#### **Product Description**

Pitch: 10.16mm, 600V, 51A

#### General information

Short description	PCB Connector
Category	PCB Connector – Socket
Pitch (mm)	10.16
Color	Green (default)
Type of locking	Without
Soldering method	Wave Soldering
Length (mm)	10.16*P
Width (mm)	13.7
Height (mm)	32
Pin demensions (Thickness x Width)(mm)	1x3.5
PCB hole diameter (mm)	1.5*4.7
Number of positions	02P~10P
Level	Single level

#### Material information


Insulation material	PA
---------------------	----


Insulation material group	I
Flame retardant rating , compliant with UL94	V0
Insulation resistance	□500MΩ at DC 500V
Conductor material	COPPER ALLOY
Plating of conductor surface	Ag PLATED
Connection data-IEC	
Rated voltage (V)	1000
Rated current (A)	76
Rated voltage (II/2)(V)	1000
Rated voltage (III/2) (V)	1000
Rated voltage (III/3)(V)	1000
Rated impulse voltage (II/2)(KV)	6
Rated impulse voltage (III/2)(KV)	8
Rated impulse voltage (III/3)(KV)	8
Connection data-UL	
Rated voltage (UL/CUL Group B)(V)	600
Rated current (UL/CUL Group B)(A)	51
Rated voltage (UL/CUL Group C)(V)	600
Rated current (UL/CUL Group C)(A)	51
Rated voltage (UL/CUL Group D)(V)	600
Rated current (UL/CUL Group D)(A)	5
Environment & Safety	
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40
UL Recognized	
Rated voltage (Group B)(V)	600
Rated current (Group B)(A)	51
Rated voltage (Group C)(V)	600
Rated current (Group C)(A)	51



5
600
51
600
51
600
5

### Drawings

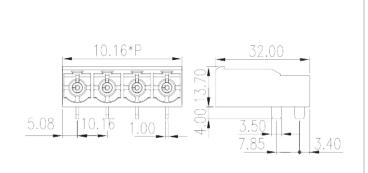



## Approvals





