



# DT-2C-B07W-XX

Barrier Terminal Blocks > Single Row

Date:2025-11-04Version:1.1

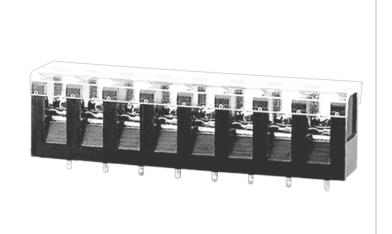

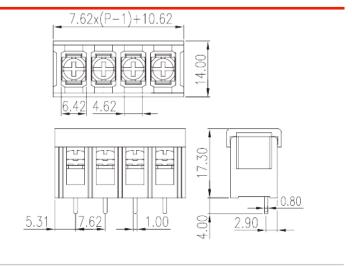

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

### **Product Description**

Pitch: 7.62mm, M3, 300V, 15A

#### General information

Short description	Barrier terminal blocks , Screw connection
Category	Single Row
Pitch (mm)	7.62
Color	Black(default)
Connection method	Screw connection
Type of locking	Without
Pin demensions (Thickness x Width)(mm)	1.0X0.8
PCB hole diameter (mm)	1.6~1.7
Level	Single Row

#### Material information

Insulation material	PBT
Insulation material group	IIIa
Flame retardant rating , compliant with UL94	VO
Conductor material	Copper Alloy
Plating of conductor surface	Tinned



### Connection data-IEC

Rated current (A)	17.5	
Rated voltage (II/2)(V)	630	
Rated voltage (III/2) (V)	630	
Rated voltage (III/3)(V)	400	
Rated impulse voltage (II/2)(KV)	6	
Rated impulse voltage (III/2)(KV)	6	
Rated impulse voltage (III/3)(KV)	6	
Conductor cross section solid. min (mm²)	0.2	
Conductor cross section solid.max (mm²)	1.5	
Conductor cross section stranded. min (mm²)	0.2	
Conductor cross section stranded. max (mm²)	1.5	
2 conductors with same cross section, solid, max (mm²)	1	
2 conductors with same cross section, stranded, max (mm²)	1	
Screw thread	M3	
Slotted screwdriver size (Blade thickness x Width)(mm)	0.8x4.0	
Philips screwdriver size	PH2	
Rated torque (N.m)	0.8	
Recommend tightening torque. min (N.m)	0.5	
Recommend tightening torque. max (N.m)	0.8	
Stripping Length (mm)	7~8	

## Connection data-UL

Rated voltage (UL/CUL Group B)(V)	300
Rated current (UL/CUL Group B)(A)	15
Min. solid wire connection (AWG) acc. to UL/CUL	22
Max. solid wire connection AWG acc. to UL/CUL	14
Min. stranded wire connection AWG acc. to UL/CUL	22
Max. stranded wire connection AWG acc. to UL/CUL	14

## Environment & Safety

Back of the hand protection (YES or NO)	YES
Operating temperature. max (°C)	130
Operating temperature. min (°C)	-40


## **UL** Recognized


Wire Range (Group B)(AWG)	22~14
Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	15


## **CUL** Recognized

Wire Range (Group B)(AWG)	22~14
Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	15

## Drawings



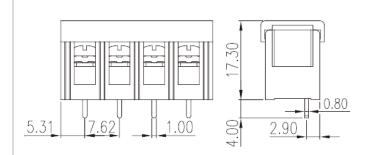



## Approvals







