


RE-H2664

Electronics & Interface > Industrial Relay

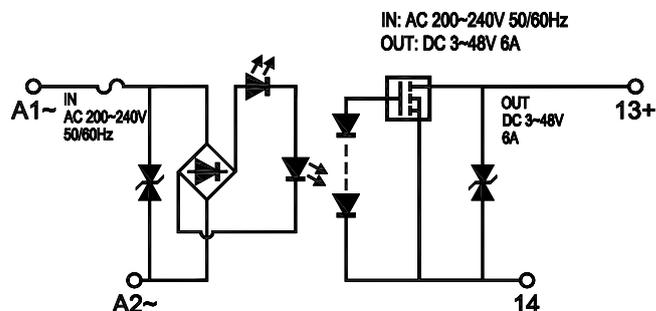

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design. The final product is made according to engineering drawing.

Technical Data

Input (Control side) Data	
Rated input voltage	200~240 VDC
Rated input current	40 mA
Status indicator	(Red) LED
Max. Switching frequency	10 Hz
Input polarity	Bipolar
Gate voltage ON / OFF	140VAC / 140VAC
Output (Load side) Data	
Rated Switching voltage	3~48 VDC
Continuous current	6 A
General Data	
Input type	NPN/PNP
Connection method	P-LUP connection
Wire range (AWG) / (mm ²)	24~12 / 0.2~4
Impulse withstand voltage	2.5 KV
Wire strip length (mm)	10
TxWxH (mm)	6.2 x 85.9 x 53.5
Package	10pcs

Approvals

