


0401-3054

廣播風暴防護PoE 乙太網交換機



Safety Standards

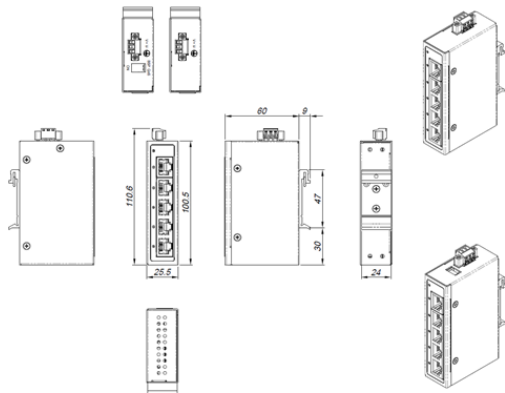

規格說明

連接介面	5xRJ-45 10/100/1000BaseT(X) auto negotiation, Auto MDI/MDI-X function, Full/Half duplex 4 x 10/100/1000M 802.3af/at PSE port
外接電源供應器	DC 48-56V Power Input
乙太網路供電	PoE power per port 30watts Maximum total power 90Watts
功耗	3.36 W@48 VDC full load without PoE
插拔式接線端子	3 Pin terminal block Wire range: 1.5mm ² Solid wire (AWG):14-28 Stranded wire(AWG): 14-28 Torque:0.2~2.5N-m Wire Strip length: 6-7mm
指撥開關 (OPTIONAL)	Dip1: Broadcast Storm Protection (BSP) Dip2: Quality of Service (QoS) *Refer to manual dip switch indicator for details*


規格說明

工作溫度	-40°C to +75°C
工作濕度	5% to 95% (Non-condensing)
殼體	Rugged Metal, IP30 Protection
長x 寬x 高(mm)	100.5 x 25.5 x 60 mm
安裝方式	DIN Rail and Wall Mount options included
包裝數量	1 pcs

認證

安全認證	UL62368-1(MET), LVD62368-1
EMC	CE, FCC, EN 55032/35
EMI	FCC Part 15 Subpart B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6KV; Air: 8KV IEC 61000-4-4 EFT: Power: 2KV; Signal: 2KV IEC 61000-4-5 Surge: Power: 2KV; Signal: 2KV

LED indicator

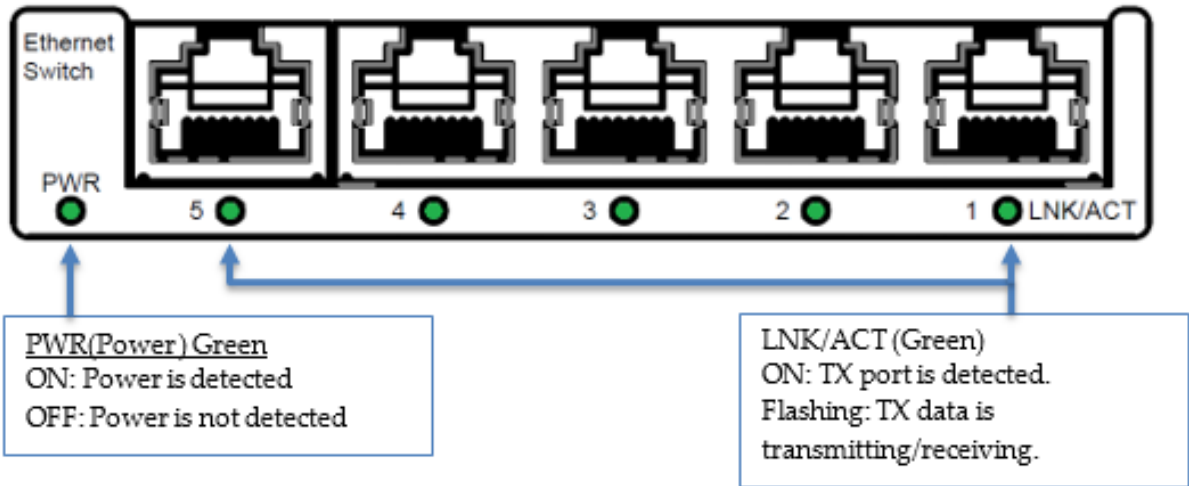

圖面

L X W X H : 100.5 x 25.5 x 60

