


TMI-YCS3-32DX-X02

系統接口板 / System Interface

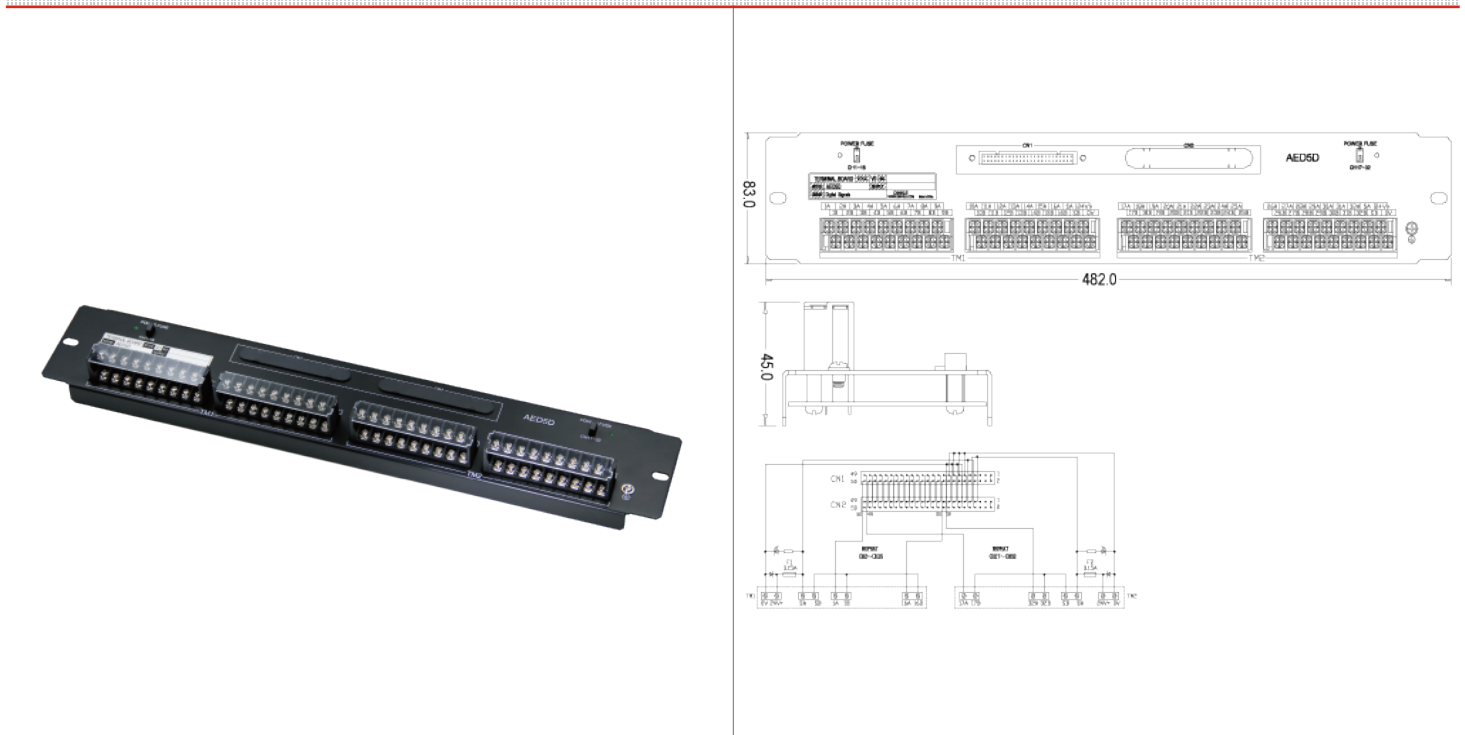

規格說明

適用控制器	YOKOGAWA CS3000
接口板訂貨規格	TMI-YCS3-32DX-X02
產品功能	DI/DO board
額定電壓	24VDC
額定電流	3.15
輸入電流 Max (單通道)	N/A
電源指示燈	LED/Green
輸入端接口 / 使用線徑	MIL 50p male
輸出端接口 / 使用線徑	18-12AWG/0.75-2.5mm²
尺寸 mm	482X83X45
工作溫度	-20~+85°C
熔斷絲	CXPF030150
防塵蓋	0032A01900

Pin Assignment

Channel	CN1&2	Terminal
CH1	50	1A
CH2	48	2A
CH3	46	3A
CH4	44	4A
CH5	42	5A
CH6	40	6A
CH7	38	7A
CH8	36	8A
CH9	34	9A
CH10	32	10A
CH11	30	11A
CH12	28	12A
CH13	26	13A
CH14	24	14A
CH15	22	15A
CH16	20	16A
CH17	49	17A
CH18	47	18A
CH19	45	19A
CH20	43	20A
CH21	41	21A
CH22	39	22A
CH23	37	23A
CH24	35	24A
CH25	33	25A
CH26	31	26A
CH27	29	27A
CH28	27	28A
CH29	25	29A
CH30	23	30A
CH31	21	31A
CH32	19	32A
COM 1-16	12 14 16 18	TM1-OV
COM 17-32	11 13 15 17	TM2-OV
24VDC	10 8	TM1-SA
24VDC	9 7	TM2-SA
NC	3 4 5 6	
CBSE	1 2	