


A101-0052/XX

轉接接口/系統電纜 / Cable System

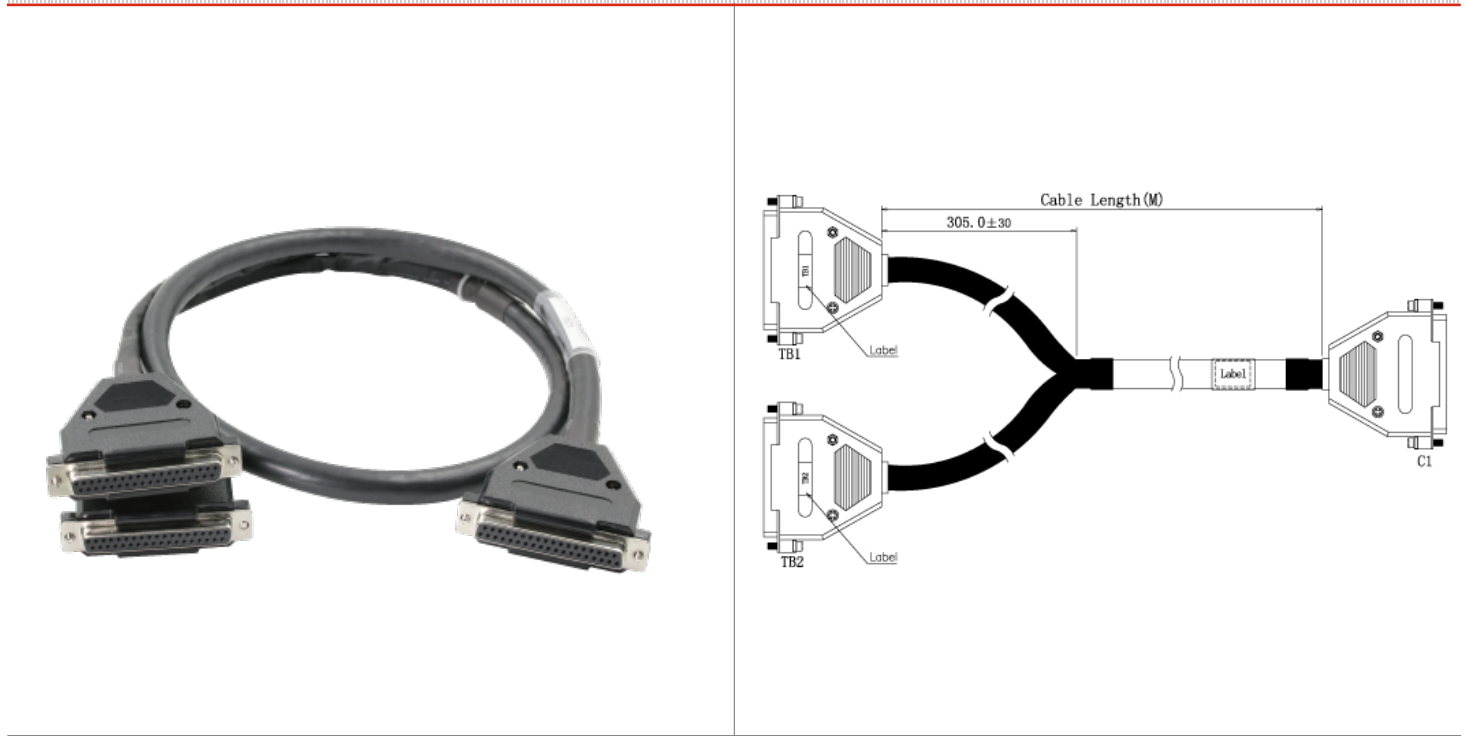

規格說明		
C300 / IOTA P/N	CC-TDIL 01/11	CC-TDOB 01/11
額定電壓	300VAC / VDC	
額定電流	1A	
使用溫度	-20℃ ~ 80℃	
連接點數	37 pins / 37*2 pins	
電纜材質	銅	
電纜規格	20AWG 21/0.18 32C tinner copper	
屏 蔽	Aluminium / poly foil 100% coverage	
配 件	N/A	

- ◆ 此預製電纜配合霍尼韋爾Experion C I O H系統使用。
- ◆ 系統端16通道端子台連接C IOTA,另一端16通道用37P D-SUB連接P+F HiC底板。
- ◆ 長度可定制,用於P+F HiC系列。

訂貨規格		長度
A101-0052/5		5M
A101-0052/10		10M
A101-0052/15		15M
A101-0052/20		20M
A101-0052/25		25M
A101-0052/30		30M
A101-0052/35		35M
A101-0052/40		40M
A101-0052/45		45M
A101-0052/50		50M

Pinning information					
Channel	C1 D-SUB	TB1 D-SUB	SIGN	C1 D-SUB	TB2 D-SUB
Channel 01	20	37	Channel 17	2	37
Channel 02	21	36	Channel 18	3	36
Channel 03	22	35	Channel 19	4	35
Channel 04	23	34	Channel 20	5	34
Channel 05	24	33	Channel 21	6	33
Channel 06	25	32	Channel 22	7	32
Channel 07	26	31	Channel 23	8	31
Channel 08	27	30	Channel 24	9	30
Channel 09	28	29	Channel 25	10	29
Channel 10	29	28	Channel 26	11	28
Channel 11	30	27	Channel 27	12	27
Channel 12	31	26	Channel 28	13	26
Channel 13	32	25	Channel 29	14	25
Channel 14	33	24	Channel 30	15	24
Channel 15	34	23	Channel 31	16	23
Channel 16	35	22	Channel 32	17	22
24V	19	1	24V	37	1
0v	18	20	0v	36	20
		19			19
		18			18
		17			17
		16			16
		15			15
		14			14
		13			13
		12			12
		11			11
		10			10
		9			9
		8			8
		7			7
		6			6
		5			5
		4			4
NC		2	NC		2
		3			3