
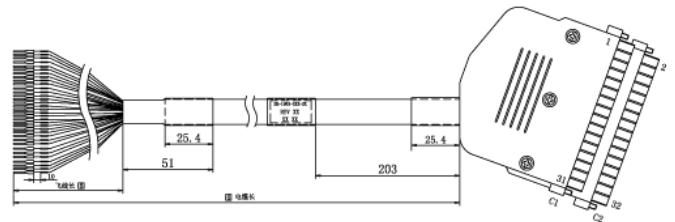


# DK-1963-AXX-30

Cable System

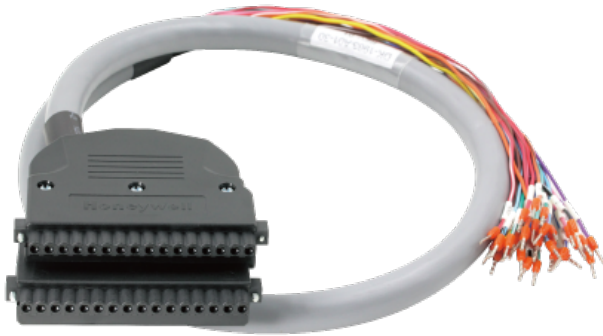

## Specification

C300 / IOTA P/N	CC-TDIL 01/11
Rated Voltage	300VAC / VDC
Rated Current	1A
Use Temperature	-20°C ~ 105°C
Munber of contacts	32 pins / 32 pins
Cable Material	Copper
Cable Specification	22AWG 17 / 0.16 32C tinner copper
Shield	Aluminium / poly foil 100% coverage
Accessories	Insulating cap ( 0211C1XX00 )

- ◆ The pre-wired cable system specifically designed to work with Honeywell Experion C I/O H system.
- ◆ System C IOTA connection: 16 poles terminal blocks ; Field DI module connection: 16 wires with ferrule.
- ◆ The length of the cable is adjustable.

## Order Information

Part Number	Length
DK-1963-A06-30	6M
DK-1963-A08-30	8M
DK-1963-A10-30	10M
DK-1963-A13-30	13M
DK-1963-A15-30	15M
DK-1963-A20-30	20M
DK-1963-A25-30	25M
DK-1963-A30-30	30M