DK-1987-BXX-4F-30

Cable System

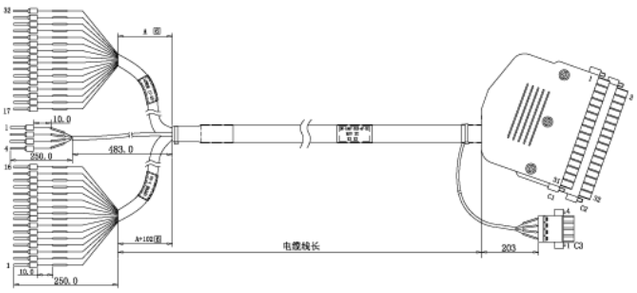

Specification

C300 / IOTA P/N	CC-TDOB 01/11
Rated Voltage	300VAC / VDC
Rated Current	1A
Use Temperature	-20℃ ~ 105℃
Munber of contacts	32+4 pins / 32+4 pins
Cable Material	Copper
Cable Specification	22AWG 17 / 0.16 32C tinner copper
Shield	Aluminium / poly foil 100% coverage
Accessories	Insulating cap （0211C1XX00）

- The pre-wired cable system specifically designed to work with Honeywell Experion C I/O H system.
- System C IOTA connection: 16 poles terminal blocks ; Field DO module connection: 16 wires with ferrule.
- The length of the cable is adjustable.

Order Information

Part Number	Length
DK-1987-B06-4F-30	6M
DK-1987-B08-4F-30	8M
DK-1987-B10-4F-30	10M
DK-1987-B13-4F-30	13M
DK-1987-B15-4F-30	15M
DK-1987-B20-4F-30	20M
DK-1987-B25-4F-30	25M
DK-1987-B30-4F-30	30M

TEL: +886-2-2908-0614 / FAX: +886-2-2908-8549 / E-mail: info@dinkle.com.tw
© DINKLE ENTERPRISE CO., LTD. ALL RIGHT RESERVED