
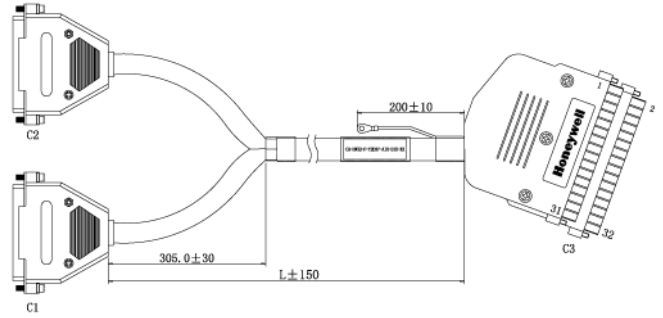


DK-3892-CXX-3S

Cable System

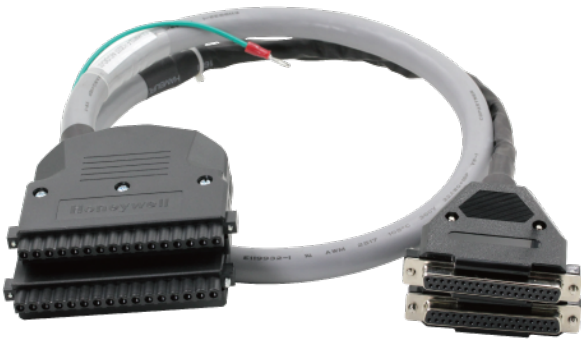

Specification

C300 / IOTA P/N	CC-TDIL 01/11	CC-TDOB 01/11
Rated Voltage	300VAC / VDC	
Rated Current	1A	
Use Temperature	-20°C ~ 105°C	
Munber of contacts	2*37 pins / 32 pins	
Cable Material	Copper	
Cable Specification	22AWG 17 / 0.16 32C tinner copper	
Shield	Aluminium / poly foil 100% coverage	
Accessories	N/A	

- ◆ The pre-wired cable system specifically designed to work with Honeywell Experion C I/O H system.
- ◆ System C IOTA connection: 16 poles terminal blocks ; Field connection: 37 D-sub connector for HIC or Hid module.
- ◆ The length of the cable is adjustable.

Order Information

Part Number	Length
DK-3892-C06-3S	6M
DK-3892-C08-3S	8M
DK-3892-C10-3S	10M
DK-3892-C13-3S	13M
DK-3892-C15-3S	15M
DK-3892-C20-3S	20M
DK-3892-C25-3S	25M
DK-3892-C30-3S	30M

C2	19	37	17	35	15	33	13	31	11	29	9	27	7	25	5	23
C3	2	1	4	3	6	5	8	7	10	9	12	11	14	13	16	15

C1	19	37	17	35	15	33	13	31	11	29	9	27	7	25	5	23
C3	18	17	20	19	22	21	24	23	26	25	28	27	30	29	32	31