


# CABDYNC300AI-XX

Cable System

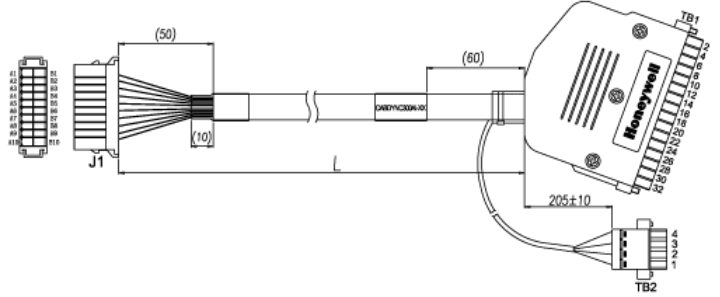

## Specification

C300 / IOTA P/N	CC-TAIX 01/11
Rated Voltage	300VAC / VDC
Rated Current	1A
Use Temperature	-20°C ~ 105°C
Munber of contacts	16+4 pins / 20 pins
Cable Material	Copper
Cable Specification	22AWG 17 / 0.16 20C tinner copper
Shield	Aluminium / poly foil 100% coverage
Accessories	N/A

- The pre-wired cable system specifically designed to work with Honeywell Experion C I/O H system.
- System C IOTA connection: 16 poles terminal blocks ; Field connection: 20P AMP D3000 connector for MTL FTA.
- The length of the cable is adjustable, suitable for MTL CC-TAIX01/11.

## Order Information

Part Number	Length
CABDYNC300AI-1	1M
CABDYNC300AI-5	5M
CABDYNC300AI-10	10M
CABDYNC300AI-15	15M
CABDYNC300AI-20	20M
CABDYNC300AI-25	25M
CABDYNC300AI-30	30M
CABDYNC300AI-35	35M
CABDYNC300AI-40	40M
CABDYNC300AI-45	45M
CABDYNC300AI-50	50M

J1	A10	B10	A09	B09	A08	B08	A07	B07	A06	B06	A05	B05	A04	B04	A03	B03	A02	B02	A01	B01
TB1			2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32		
TB2	1	2																	3	4