


CABDYNC300DI-XX

Cable System

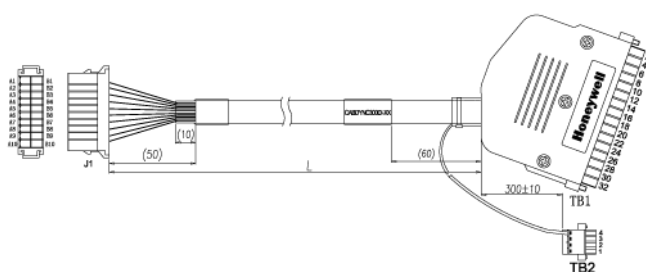

Specification

C300 / IOTA P/N	CC-TDIL 01/11 16ch digital input
Rated Voltage	300VAC / VDC
Rated Current	1A
Use Temperature	-20°C ~ 105°C
Munber of contacts	16 pins / 20 pins
Cable Material	Copper
Cable Specification	22AWG 17 / 0.16 16C tinner copper
Shield	Aluminium / poly foil 100% coverage
Accessories	N/A

- ♦ The pre-wired cable system specifically designed to work with Honeywell Experion C I/O H system.
- ♦ System C IOTA connection: 16 poles terminal blocks ; Field connection: 20P AMP D3000 connector for MTL FTA.
- ♦ The length of the cable is adjustable, suitable for CC-TDIL01/11 .

Order Information

Part Number	Length
CABDYNC300DI-1	1M
CABDYNC300DI-5	5M
CABDYNC300DI-10	10M
CABDYNC300DI-15	15M
CABDYNC300DI-20	20M
CABDYNC300DI-25	25M
CABDYNC300DI-30	30M
CABDYNC300DI-35	35M
CABDYNC300DI-40	40M
CABDYNC300DI-45	45M
CABDYNC300DI-50	50M

J1	A10	B10	A09	B09	A08	B08	A07	B07	A06	B06	A05	B05	A04	B04	A03	B03	A02	B02	A01	B01
TB1			2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32		
TB2	4																			