


K021-A006/XX

Cable System

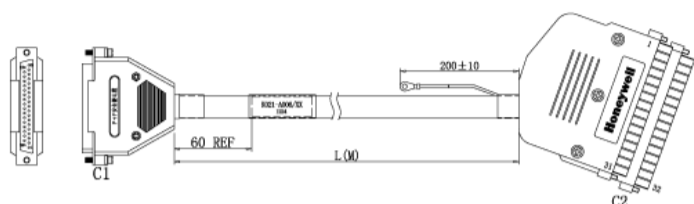

Specification

C300 / IOTA P/N	CC-TDIL 01/11	CC-TDOB 01/11
Rated Voltage	300VAC / VDC	
Rated Current	1A	
Use Temperature	-20°C ~ 80°C	
Munber of contacts	37 pins / 32 pins	
Cable Material	Copper	
Cable Specification	22AWG 17 / 0.16 32C tinner copper	
Shield	Aluminium / poly foil 100% coverage	
Accessories	N/A	

- ◆ The pre-wired cable system specifically designed to work with Honeywell Experion C I/O H system.
- ◆ System C IOTA connection: 16 poles terminal blocks ; Field connection: 37 D-sub connector for P+F HiC or HiD.
- ◆ The length of the cable is adjustable, suitable for P+F HiC series.

Order Information

Part Number	Length
K021-A006/5	5M
K021-A006/10	10M
K021-A006/15	15M
K021-A006/20	20M
K021-A006/25	25M
K021-A006/30	30M
K021-A006/35	35M
K021-A006/40	40M
K021-A006/45	45M
K021-A006/50	50M

C1	19	37	18	36	35	16	34	15	33	14	32	13	31	12	30
C2	2	1	4	3	5	8	7	10	9	12	11	14	13	16	15

C1	11	29	10	28	27	8	26	7	25	6	24	5	23	4	22
C2	18	17	20	19	21	24	23	26	25	28	27	30	29	32	31