


A101-0052/XX

Cable System

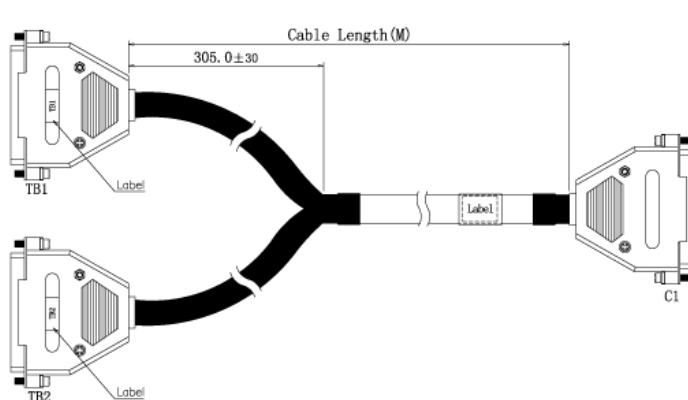

Specification

C300 / IOTA P/N	CC-TDIL 01/11	CC-TDOB 01/11
Rated Voltage	300VAC / VDC	
Rated Current	1A	
Use Temperature	-20°C ~ 80°C	
Munber of contacts	37 pins / 37*2 pins	
Cable Material	Copper	
Cable Specification	20AWG 21/0.18 32C tinner copper	
Shield	Aluminium / poly foil 100% coverage	
Accessories	N/A	

- The pre-wired cable system specifically designed to work with Honeywell Experion C I/O H system.
- System C IOTA connection: 16 poles terminal blocks ; Field connection: 37 D-sub connector for P+F HiC or HiD.
- The length of the cable is adjustable, suitable for P+F HiC series.

Order Information

Part Number	Length
A101-0052/5	5M
A101-0052/10	10M
A101-0052/15	15M
A101-0052/20	20M
A101-0052/25	25M
A101-0052/30	30M
A101-0052/35	35M
A101-0052/40	40M
A101-0052/45	45M
A101-0052/50	50M

Pinning information

Channel	C1 D-SUB	TB1 D-SUB	SIGN	C1 D-SUB	TB2 D-SUB
Channel 01	20	37	Channel 17	2	37
Channel 02	21	36	Channel 18	3	36
Channel 03	22	35	Channel 19	4	35
Channel 04	23	34	Channel 20	5	34
Channel 05	24	33	Channel 21	6	33
Channel 06	25	32	Channel 22	7	32
Channel 07	26	31	Channel 23	8	31
Channel 08	27	30	Channel 24	9	30
Channel 09	28	29	Channel 25	10	29
Channel 10	29	28	Channel 26	11	28
Channel 11	30	27	Channel 27	12	27
Channel 12	31	26	Channel 28	13	26
Channel 13	32	25	Channel 29	14	25
Channel 14	33	24	Channel 30	15	24
Channel 15	34	23	Channel 31	16	23
Channel 16	35	22	Channel 32	17	22
24V	19	1	24V	37	1
0v	18	20	0v	36	20
		19			19
		18			18
		17			17
		16			16
		15			15
		14			14
		13			13
		12			12
		11			11
		10			10
		9			9
		8			8
		7			7
		6			6
		5			5
		4			4
NC		2	NC		2
		3			3