
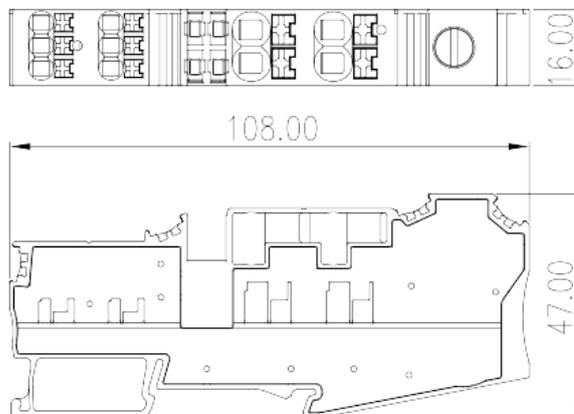


DKD35-P001

DIN

>

:2026-05-14

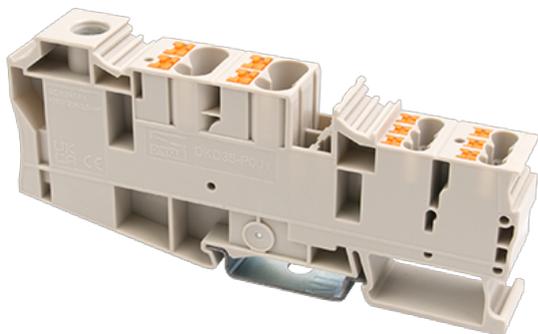

600V, 102A, Beige (default)

	Potential collective Terminal Block, Screw Connection / Push-in Design
	Potential collective Terminal Block
	Beige (default)
	Screw Connection / Push-in Design
(mm)	108
(mm)	16
(mm)	47
()	1P
	Single level
	11
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(V)	1000
(A)	Line Side: 105 / Load Side1: 41 / Load Side2: 24
(III/3)(V)	1000
(III/3)(KV)	8
(mm ²)	Line Side: 1.5 / Load Side1: 0.5 / Load Side2: 0.2
(mm ²)	Line Side: 50 / Load Side1: 10 / Load Side2: 4
(mm ²)	Line Side: 1.5 / Load Side1: 0.5 / Load Side2: 0.2
(mm ²)	Line Side: 35 / Load Side1: 6 / Load Side2: 2.5
(mm ²) , ,	Line Side: 1.5 / Load Side1: 0.5 / Load Side2: 0.25
(mm ²) , ,	Line Side: 35 / Load Side1: 6 / Load Side2: 2.5
(mm ²) , ,	Line Side: 1.5 / Load Side1: 0.5 / Load Side2: 0.25
(mm ²) , ,	Line Side: 35 / Load Side1: 6 / Load Side2: 2.5
2 (mm ²)	1.5
2 (mm ²)	16
2 (mm ²)	1.5
2 (mm ²)	10
(mm ²) ² , ,	1.5
(mm ²) ² , ,	10
2 (mm ²) , ,	Line Side: 1.5 / Load Side1: 0.5 / Load Side2: 0.5
2 (mm ²) , ,	Line Side: 10 / Load Side1: 1.5 / Load Side2: 0.5
	M6
Philips	0.6X3.5 / 0.8X4 / 1X5.5
(N.m)	4
(N.m)	6
	Line Side: 14~16/ Load Side1: 11~12 / Load Side2:9~10
	TS-35
	NO
	NO

-UL



(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		102 (Line Side) 40 (Load Side 1) 20 (Load Side 2)
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		102 (Line Side) 40 (Load Side 1) 20 (Load Side 2)
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	Line Side: 12 / Load Side1: 20 / Load Side2: 26
UL/CUL	AWG	Line Side: 1/0 / Load Side1: 8 / Load Side2: 12
UL/CUL	AWG	Line Side: 12 / Load Side1: 20 / Load Side2: 26
UL/CUL	AWG	Line Side: 1/0 / Load Side1: 8 / Load Side2: 12

&

(YES or NO)		YES
가 (YES or NO)		NO
		120
		-40

UL

(Group B)(AWG)		Line Side : 12~1/0 / Load Side1: 20~8 / Load Side2: 26~12
(Group B)(V)		600
(Group B)(A)		Line Side : 102 / Load Side1: 40 / Load Side2: 20
(Group C)(AWG)		Line Side : 12~1/0 / Load Side1: 20~8 / Load Side2: 26~12
(Group C)(V)		600
(Group C)(A)		Line Side : 102 / Load Side1: 40 / Load Side2: 20
(Group D)(AWG)		Line Side : 12~1/0 / Load Side1: 20~8 / Load Side2: 26~12
(Group D)(V)		600
(Group D)(A)		5

CUL

(Group B)(AWG)		Line Side : 12~1/0 / Load Side1: 20~8 / Load Side2: 26~12
(Group B)(V)		600
(Group B)(A)		Line Side : 102 / Load Side1: 40 / Load Side2: 20

(Group C)(AWG)	Line Side : 12~1/0 / Load Side1: 20~8 / Load Side2: 26~12
(Group C)(V)	600
(Group C)(A)	Line Side : 102 / Load Side1: 40 / Load Side2: 20
(Group D)(AWG)	Line Side : 12~1/0 / Load Side1: 20~8 / Load Side2: 26~12
(Group D)(V)	600
(Group D)(A)	5

