
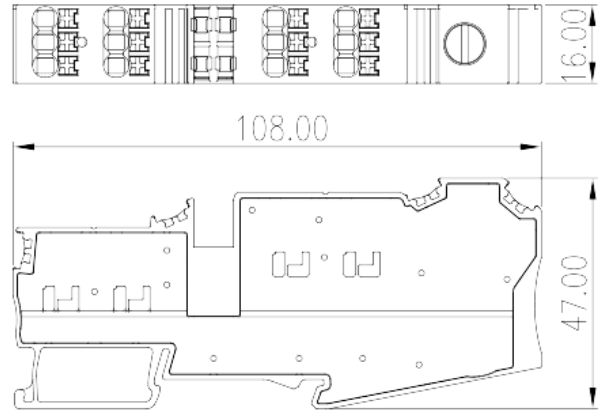


# DKD35-P002

DIN

>

:2026-07-05

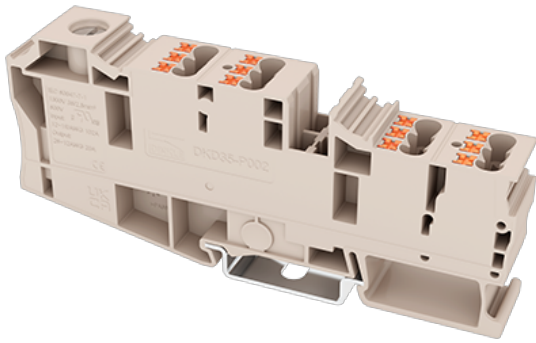

600V, 102A, Beige (default)

	Potential collective Terminal Block, Screw Connection / Push-in Design
	Potential collective Terminal Block
	Beige (default)
	Screw Connection / Push-in Design
	Rail Mounting
(mm)	108
(mm)	16
(mm)	47
( )	1P
	Single level
	13
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)		1000
(A)		Line Side: 105 / Load Side: 24
(III/3)(V)		1000
(III/3)(KV)		Line Side: 8 / Load Side: 8
(mm <sup>2</sup> )		Line Side: 1.5 / Load Side: 0.2
(mm <sup>2</sup> )		Line Side: 50 / Load Side: 4
(mm <sup>2</sup> )		Line Side: 1.5 / Load Side: 0.2
(mm <sup>2</sup> )		Line Side: 35 / Load Side: 2.5
(mm <sup>2</sup> )	,	Line Side: 1.5 / Load Side: 0.25
(mm <sup>2</sup> )	,	Line Side: 35 / Load Side: 2.5
(mm <sup>2</sup> )	,	Line Side: 1.5 / Load Side: 0.25
(mm <sup>2</sup> )	,	Line Side: 35 / Load Side: 2.5
2	(mm <sup>2</sup> )	Line Side: 1.5
2	(mm <sup>2</sup> )	Line Side: 16
2	(mm <sup>2</sup> )	Line Side: 1.5
2	(mm <sup>2</sup> )	Line Side: 10
(mm <sup>2</sup> )	2 ,	Line Side: 1.5
(mm <sup>2</sup> )	2 ,	Line Side: 10
(mm <sup>2</sup> )	2 ,	Line Side: 1.5 / Load Side: 0.5
(mm <sup>2</sup> )	2 ,	Line Side: 10 / Load Side: 0.5
		Line Side:M6
Width)(mm)	(Blade thickness x	Line Side: 1X5.5/ Load Side:0.6X3.5
(N.m)		Line Side:4
(N.m)		Line Side:6
		Line Side: 14~16/ Load Side:9~10
		TS-35
		NO
		NO

## -UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		102 ( Line ) 20 ( Load )
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		102 ( Line ) 20 ( Load )
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	Line Side: 12 / Load Side: 26
UL/CUL	AWG	Line Side: 1/0 / Load Side: 12
UL/CUL	AWG	Line Side: 12 / Load Side: 26
UL/CUL	AWG	Line Side: 1/0 / Load Side: 12

## &

(YES or NO)		YES
가 (YES or NO)		NO
		120
		-40

## UL

(Group B)(AWG)		Line Side : 12~1/0 / Load Side : 26~12
(Group B)(V)		600
(Group B)(A)		Line Side : 102 / Load Side : 20
(Group C)(AWG)		Line Side : 12~1/0 / Load Side : 26~12
(Group C)(V)		600
(Group C)(A)		Line Side : 102 / Load Side : 20
(Group D)(AWG)		Line Side : 12~1/0 / Load Side : 26~12
(Group D)(V)		600
(Group D)(A)		5

## CUL

(Group B)(AWG)		Line Side : 12~1/0 / Load Side : 26~12
(Group B)(V)		600
(Group B)(A)		Line Side : 102 / Load Side : 20
(Group C)(AWG)		Line Side : 12~1/0 / Load Side : 26~12

(Group C)(V)	600
(Group C)(A)	Line Side : 102 / Load Side : 20
(Group D)(AWG)	Line Side : 12~1/0 / Load Side : 26~12
(Group D)(V)	600
(Group D)(A)	5

