



# DK4N-PE

DIN

&gt;

:2026-05-14

:1.2

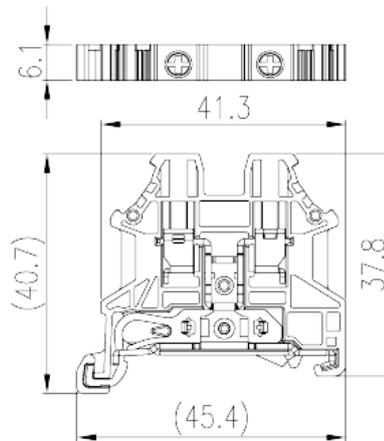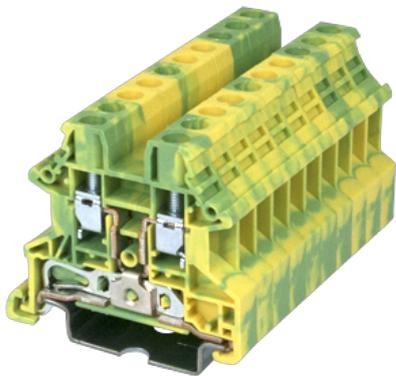

M3, Green-Yellow (default)

	Grounding Terminal Block, Screw Connection
	Grounding terminal blocks
	Green-Yellow (default)
	Screw connection
	Rail mounting
(mm)	45.4
(mm)	6.1
(mm)	40.7
( )	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

## -IEC

(V)		1000
(III/3)(V)		1000
(III/3)(KV)		8
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )	,	0.25
(mm <sup>2</sup> )	,	4
(mm <sup>2</sup> )	,	0.25
(mm <sup>2</sup> )	,	2.5
2	(mm <sup>2</sup> )	0.14
2	(mm <sup>2</sup> )	2.5
2	(mm <sup>2</sup> )	0.14
2	(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	2 ,	0.25
(mm <sup>2</sup> )	2 ,	1
2	(mm <sup>2</sup> ) ,	0.5
2	(mm <sup>2</sup> ) ,	2.5
		M3
Width)(mm)	(Blade thickness x	0.6x3.5
Philips		PH1
(N.m)		0.5
(N.m)		0.6
		8~10
		TS-35、TS-35/15
		YES
		YES

## -UL

(UL/CUL Group B)(V)		600
(UL/CUL Group C)(V)		600
UL/CUL	AWG	28
UL/CUL	AWG	10
UL/CUL	AWG	28
UL/CUL	AWG	10

## &

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

## UL

(Group B)(AWG)		28~10
(Group B)(V)		600
(Group C)(AWG)		28~10
(Group C)(V)		600

## CUL

(Group B)(AWG)		28~10
(Group B)(V)		600
(Group C)(AWG)		28~10
(Group C)(V)		600

## VDE

(mm <sup>2</sup> )		0.14~4
(V)		1000

