
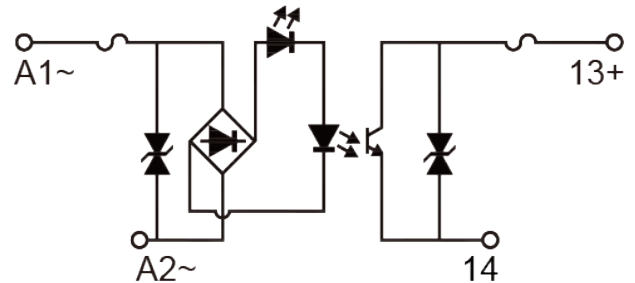


# RE-S0564

Electronics & Interface > Industrial Relay

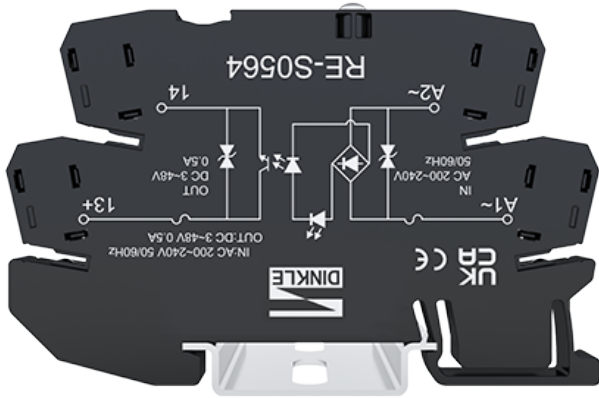

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Technical Data

Input (Control side) Data	
Rated input voltage	200~240 VAC
Rated input current	0.6~1.1 mA
Status indicator	(Red) LED
Max. Switching frequency	10 Hz
Input polarity	Bipolar
Gate voltage ON / OFF	130 VAC / 130 VAC
Output (Load side) Data	
Rated Switching voltage	3~48 VDC
Continuous current	0.5 A
Voltage drop at Max	≐ 1.5 V
Leakage current	≐ 0 A
General Data	
Connection type	NPN/PNP Sink/Source
Connection method	Screw connection
Wire range (AWG) / (mm <sup>2</sup> )	24~12 / 0.2~4
Impulse withstand voltage	2.5 KV
Wire strip length (mm)	6~7



Insulating material	PA
Min. torque (N-m)	0.4
Max. torque (N-m)	0.5
TxWxH (mm)	6.2 x 81.8 x 53.5
Package	10pcs

## Approvals

