



0188-01XXSMDW

R

PCB

> PCB

:2026-02-10

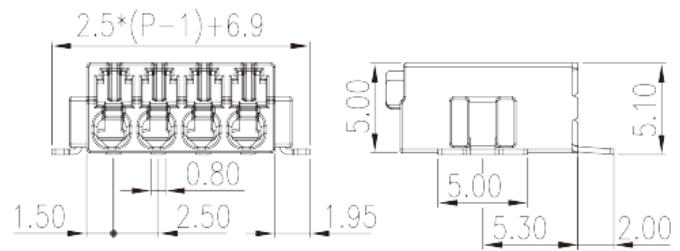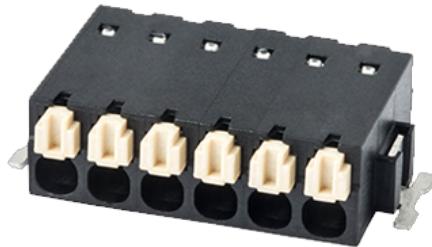

Pitch : 2.50mm, 150V, 5A

	PCB Terminal Blocks, Push-in Design
	PCB Terminal Blocks
(mm)	2.50
	Black (default)
	Push in Design
	Without
	Reflow Soldering (245)
(mm)	2.50*(P-1)+6.9
(mm)	10.7
(mm)	5
(x) (mm)	0.3x0.8
()	02P~20P
	Single level

HIGH-TEMPERATURE PLASTICS

	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
MSL	2

-IEC

(V)	160
(A)	6
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	63
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm ²)	0.2
(mm ²)	0.5
(mm ²)	0.2
(mm ²)	0.5
(mm ²) , , ,	0.25
(mm ²) , , ,	0.5
	7~8

-UL

(UL/CUL Group B)(V)	150
(UL/CUL Group B)(A)	5
UL/CUL	AWG 26
UL/CUL	AWG 18
UL/CUL	AWG 26
UL/CUL	AWG 18

&

가	(YES or NO)	YES
---	-------------	-----

120

-40

UL

(Group B)(AWG)	26~18
(Group B)(V)	150
(Group B)(A)	5

CUL

(Group B)(AWG)	26~18
(Group B)(V)	150
(Group B)(A)	5

