
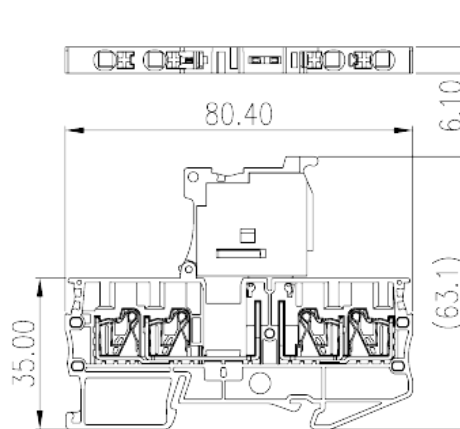


# DP2.5NU-TR-TFLXX

DIN

>

:2026-07-05

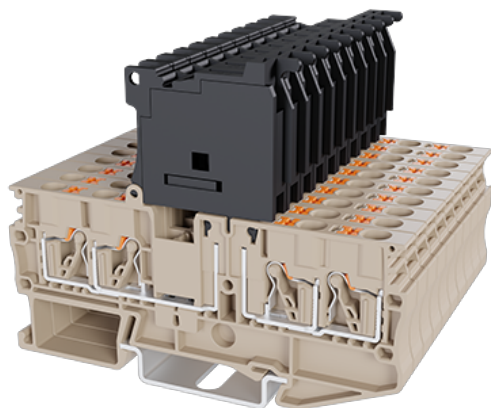

24V/60V/110V/250V, 12A, Beige (default)

	Fuse Terminal Block, Push-in Design
	Fuse Terminal Block
	Refer to drawing
	Push-in Design
	Rail Mounting
(mm)	80.4
(mm)	6.1
(mm)	64.6 ( TS-35N ) / 72.1 ( TS-35/15N )
( )	1P
	Single level
	4
	PA
	I
UL 94	V0

500M at DC 500V

**-IEC**

(V)	24/60/110/250
(A)	6.3 (the Current is determined by the fuse used)
(III/3)(V)	24/60/110/250
(III/3)(KV)	4
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
Width)(mm) (Blade thickness x	0.6x3.5
	9~10
	TS-35N、TS-35/15N
	YES
	NO

**-UL**

(UL/CUL Group B)(V)	24/60/110/250
(UL/CUL Group B)(A)	12
(UL/CUL Group C)(V)	24/60/110/250
(UL/CUL Group C)(A)	12
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26

UL/CUL	AWG	12
<b>&amp;</b>		
	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

### UL

(Group B)(AWG)	26~12
(Group B)(V)	24/60/110/250
(Group B)(A)	12
(Group C)(AWG)	26~12
(Group C)(V)	24/60/110/250
(Group C)(A)	12

### CUL

(Group B)(AWG)	26~12
(Group B)(V)	24/60/110/250
(Group B)(A)	12
(Group C)(AWG)	26~12
(Group C)(V)	24/60/110/250
(Group C)(A)	12

