


# EC116V-XXP

PCB Terminal Blocks > PCB Connector-Plug

Date:2025-11-04Version:1.1



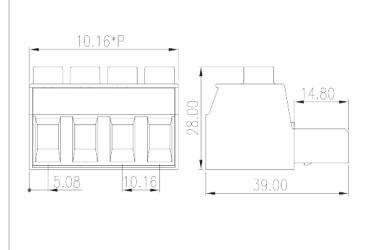

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

### **Product Description**

Pitch: 10.16 mm, 600V, 51A

#### General information

Short description	PCB Connector – Plug, Screw Connection
Category	PCB Connector – Plug
Pitch (mm)	10.16
Color	Green (default)
Connection method	Screw Connection
Type of locking	Without
Length (mm)	10.16*P
Width (mm)	39
Height (mm)	28
Number of positions	02P~10P
Level	Single level


#### Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0



Insulation resistance	□500MΩ at DC 500V
Conductor material	COPPER ALLOY
Plating of conductor surface	Ag PLATED
Connection data-IEC	
Rated voltage (V)	1000
Rated current (A)	76
Rated voltage (II/2)(V)	1000
Rated voltage (III/2) (V)	1000
Rated voltage (III/3)(V)	800
Rated impulse voltage (II/2)(KV)	8
Rated impulse voltage (III/2)(KV)	8
Rated impulse voltage (III/3)(KV)	8
Conductor cross section solid. min (mm²)	0.5
Conductor cross section solid.max (mm²)	16
Conductor cross section stranded. min (mm²)	0.5
Conductor cross section stranded. max (mm²)	16
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	0.5
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	16
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	0.5
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	10
2 conductors with same cross section, solid, max (mm²)	6
2 conductors with same cross section, stranded, max (mm²)	6
2 conductors with same cross section flexible, with min ferrule without plastic sleeve (mm²)	0.5
2 conductors with same cross section flexible, with max ferrule without plastic sleeve (mm²)	4
2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm²)	0.5
2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm²)	4
Screw thread	M4
Slotted screwdriver size (Blade thickness x Width)(mm)	1.0x5.5
Philips screwdriver size	PH2

Rated torque (N.m)	1.8
Stripping Length (mm)	14~15
Connection data-UL	
Rated voltage (UL/CUL Group B)(V)	600
Rated current (UL/CUL Group B)(A)	51
Min. solid wire connection (AWG) acc. to UL/CUL	16
Max. solid wire connection AWG acc. to UL/CUL	6
Min. stranded wire connection AWG acc. to UL/CUL	16
Max. stranded wire connection AWG acc. to UL/CUL	6
Environment & Safety	
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40
UL Recognized	
UL Recognized Wire Range (Group B)(AWG)	16~6
	16~6 600
Wire Range (Group B)(AWG)	
Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)  Rated current (Group B)(A)	600
Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)	600
Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)  Rated current (Group B)(A)  CUL Recognized	600 51
Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)  Rated current (Group B)(A)  CUL Recognized  Wire Range (Group B)(AWG)	600 51 16~6
Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)  Rated current (Group B)(A)  CUL Recognized  Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)	600 51 16~6 600
Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)  Rated current (Group B)(A)  CUL Recognized  Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)  Rated current (Group B)(A)	600 51 16~6 600
Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)  Rated current (Group B)(A)  CUL Recognized  Wire Range (Group B)(AWG)  Rated voltage (Group B)(V)  Rated current (Group B)(A)  VDE Approval	600 51 16~6 600 51

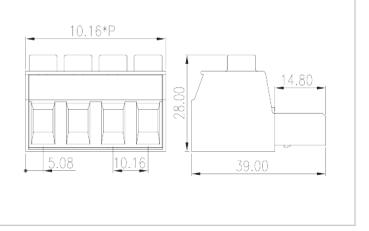

## Approvals









